


### Overview

The leading edge HP UPS R3000 XR Uninterruptible Power System features a slim 2U rack-mount design, offering up to 2700 Watts of true power. This new rack-space saving design allows more support for critical rack mountable equipment. This product is a refresh of our existing R3000 UPS, and brings unprecedented power density and innovative features to the proven HP family of rack-mountable UPS products.

The new UPS R3000 XR is a high power density solution, designed for customers who want to provide power protection in space-constrained rack enterprise environments. In addition, this new UPS R3000 XR has the capability to be connected to an optional Extended Runtime Module (ERM). Customers can further increase the run-time on their UPS R3000 XR by using this ERM. The HP UPS "XR" models denote "eXtended Runtime Capable" UPS models.

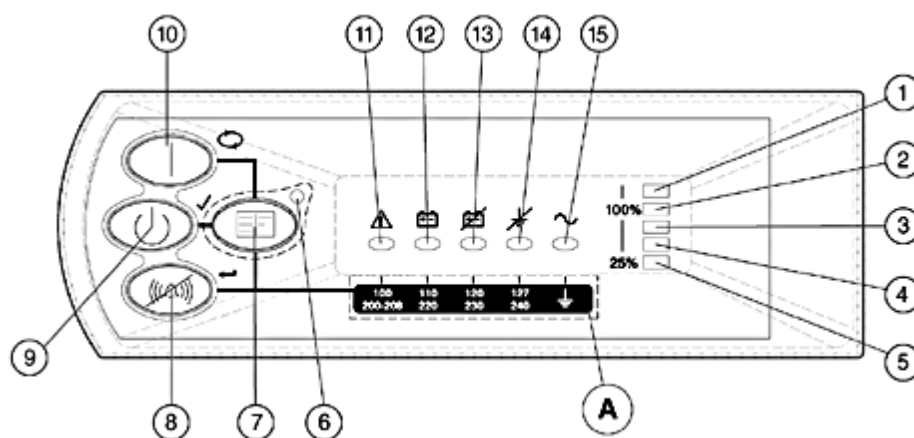

1. LED indicating Overload capacity
  2. LED indicating 76% to 100% load capacity
  3. LED indicating 51% to 75% load capacity
  4. LED indicating 26% to 50% load capacity
  5. LED indicating 0% to 25% load capacity
  6. Configure mode on LED\*
  7. Configure Button\*
  8. TEST/ALARM RESET Button
  9. STANDBY Button
  10. ON Button
  11. General Alarm
  12. LED indicating 26% to 50% load capacity
  13. Bad Battery/Low Battery
  14. Site Wiring Fault Indicator
  15. Utility LED
- Voltage Configuration Panel\*
- A. \*Accessible only when the front bezel is removed

### Models

HP UPS R3000 XR, Low Voltage (US)	192186-001
HP UPS R3000 XR, Low Voltage (JPN)	192186-291
HP UPS R3000 XR, High Voltage (US)	192186-002
HP UPS R3000 XR, High Voltage (JPN)	192186-292
HP UPS R3000 XR, High Voltage (INTL)	192186-B31
HP UPS R3000 XR, High Voltage (INTL)	192186-B32
HP UPS R3000 XR, High Voltage (INTL)	192186-B33
HP UPS R3000 XR, High Voltage (INTL)	192186-AR1

## Overview

### Key Features

- Increased power density with up to 3000VA / 2700 Watts of power packed in just 2U rack space
- Greater system uptime with support for Extended Runtime Module (ERM)
- Easy configuration through enhanced front panel display
- Enterprise-wide intelligent manageability with bundled power management software
- Support for HP Option Cards that extend the power management capabilities of the UPS
- More efficient voltage regulation with revolutionary technology
- Ultimate long-term battery reliability with HP Enhanced Battery Management
- Enhanced system flexibility with three independently controlled load segments
- Support for Remote Emergency Power Off (REPO) circuitry
- Easy serviceability through modular design
- Hot-Swappable Battery and Electronics Modules
- Backed by a limited three-year warranty, HP's Pre-Failure warranty, and a \$25,000 load protection guarantee (Certain restrictions and exclusions apply)

### Product Highlights

#### 2U Power Packed Design

Rated near unity at 3000VA / 2700W, the HP UPS R3000 XR packs more power in space-conserving rack-mount design, allowing you to support more critical equipment in your rack.

---

#### Increase System Uptime with Extended Runtime Modules

The Extended Runtime Modules are rack mounted battery modules that occupy 2U (3.5 inches) of rack space. The HP UPS R3000 XR supports one Extended Runtime Module (ERM), which extends your overall battery runtime.

---

#### Lower Cost of Ownership with Innovative Technology

The HP UPS R3000 XR utilizes a new industry-leading technology that continually conditions and regulates power without using the battery, thereby increasing the life of the battery. The output voltage is automatically regulated, based on the connected load and the input voltage.

---

#### Investment Protection with HP Enhanced Battery Management

HP UPS R3000 XR incorporates Enhanced Battery Management: an exclusive, patented technology that doubles battery service life, optimizes battery recharge time, and provides advance notice of pending battery failure. With Enhanced Battery Management, you have a lower total cost of ownership and receive the best in the industry protection for your critical equipment.

---

#### Enhanced System Flexibility with HP Option Cards

The UPS R3000 XR models are equipped with a standard serial communications port via an internal slot. This option slot supports two option cards, the Six Port Card and the SNMP / Serial Port Card. These option cards seamlessly integrate into the back of the R3000 XR and provide increased system flexibility.

---

#### Remotely Monitor UPSs on the Network

The SNMP / Serial Port Card features the ability to perform simultaneous network and out-of-band communications. It enables network administrators to remotely monitor UPSs and reboot network devices. It provides SNMP functionality, including power event alerts, network power diagnostics, and remote UPS reboot and testing. Used in conjunction with the provided Online power management software or SNMP capable Network Management Software, power-related problems on the network are quickly discovered and remedied.

---

#### Easy Configuration via Enhanced Front Panel Display

LED and switch membrane integrated into the front panel with four button controls (three buttons for UPS power control and one button under the front bezel for configuration)

---

#### Intelligent Manageability


HP Power Management Software, an integrated component of HP Insight Manager, the industry-leading hardware management platform, is included with the HP UPS R3000 XR models. The HP Power Management Software enables you to monitor and control HP UPSs locally or remotely. This software is a versatile, fully configurable, alert response tool that gives system administrators a full overview of the network's conditions. It enables you to monitor system status and power conditions, configure shut down timing, customize alert messages, and perform UPS diagnostic checks quickly and easily.

---

### Product Highlights

#### Independently Controllable Load Segments

With three load segments, you have the flexibility to configure scheduled startups and shutdowns, in addition to independently control the separate load segments. Working in conjunction with HP Power Management Software, the HP UPS R3000 XR can be configured to extend the runtime for more critical devices.

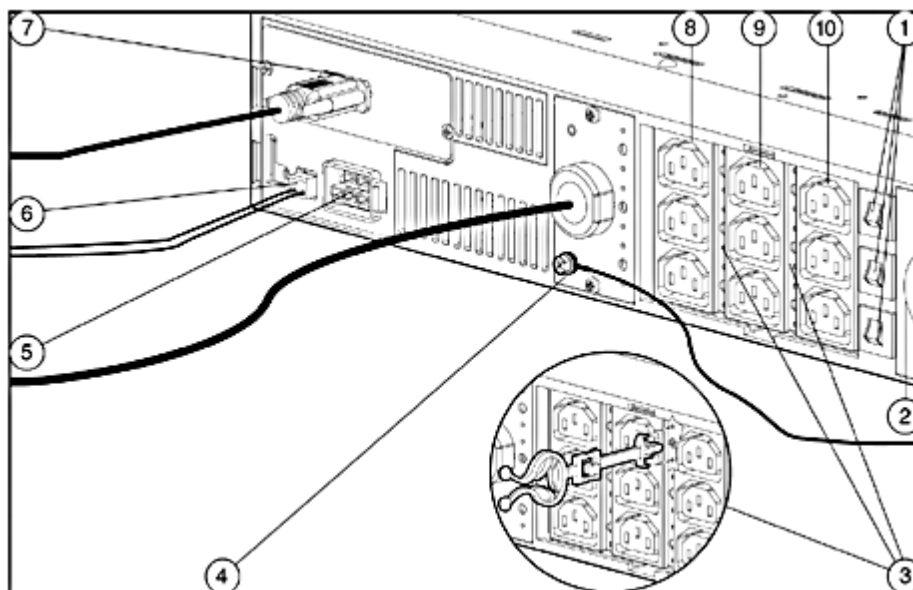

- |   |                                    |
|---|------------------------------------|
| 1. Load Segment Circuit Protectors          | 6. REPO Port                       |
| 2. HP PDU output receptacle*                | 7. Communications Port/Option Slot |
| 3. Cord retention clip attachment locations | 8. Load Segment 1                  |
| 4. Ground bonding screw                     | 9. Load Segment 2                  |
| 5. ERM Connector                            | 10. Load Segment 3                 |

#### Ease of Maintenance with Hot-Swappable Batteries and Electronics Modules

The UPS R3000 XR is modular in design, and both the battery and the electronics modules are hot swappable. HP UPSs are designed with simple access through the front panel. Users can safely install new batteries and even the electronics module without ever powering down connected server and server options.

#### HP Quality

HP's hardware qualification is the toughest in the industry. Extensive evaluation, testing, product improvement, and an unsurpassed warranty guarantee the highest level of system protection, electrical performance, product quality and compatibility.

#### Warranty

The HP UPS R3000 XR is covered by a three year warranty with the first year including parts and labor. Also, standard on all HP UPS units is our exclusive Pre-Failure Warranty which extends the advantage of a HP three-year, limited warranty by applying it to the battery before it actually fails. This warranty is offered worldwide. Specifically, the Pre-Failure Battery Warranty ensures that when customers receive notification from HP Power Management Software that the battery may fail, the battery is replaced free of charge under the warranty.

**NOTE:** [\\$25,000 Computer/Load Protection Guarantee](#) is also provided, in addition to the HP three year, limited warranty.

## Service and Support, HP Care Pack, and Warranty Information

### HP Care Pack Installation

Hardware Installation (Electronic)

U4693E

Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical.

A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 hours, 5 day to 24 hours, 7 days call window with options including 4 hour response or 6-hour Call To Repair
- Comprehensive range of software technical support for Microsoft, Linux, ProLiant Essentials and VMware-based IT solutions helping to deliver high level of application availability. Response times range from 30 mins for critical problems to 2 hours.
- System Management, Performance Services and Mission Critical Support Solution.

**NOTE:** For more information on HP Care Pack services, contact any of our worldwide sales offices, resellers or visit our worldwide website at: <http://www.hp.com/hps/carepack>

**NOTE:** For more complete information on HP Services offerings, customers and resellers, please visit is at: <http://www.hp.com/hps>

**NOTE:** Additional information regarding worldwide limited warranty and technical support is available at:

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

**NOTE:** For additional information on Server Services, Rack and Power Options, please visit:

<http://h20219.www2.hp.com/services/cache/111072-0-0-225-121.html>

**NOTE:** The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind.

**NOTE:** The warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services.

**NOTE:** Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

---

### Warranty Upgrade Options

- Response - Upgrade on-site response from next business day to same day 4 hours
- Coverage - Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours
- Duration - Select duration of coverage for a period of 1, 3, or 5 years

---

### Components

The following brick level options/components do not have individual HP Care Pack Services. These items will be included in product HP Care Pack Services into which they are installed.

Disk Drives	Tape Drives	CD/DVD ROM	SCSI Hubs in SBBs	Adapters
Bus Converters	Backplane RAID Controllers	Power Supplies/UPS	Cabling	Fans

## *Innovative Options to Meet Your Data Center Needs*

<b>Optional SNMP/Serial Port Card</b>	Ideal for networked environments, this option card enables network administrators to remotely diagnose, monitor and reboot network devices via SNMP.
<b>Optional Six Port Card</b>	This option card lets you communicate (via standard DB-9 serial ports) with multiple servers. The maximum number of servers that can be connected using this card depends on the number of load segments available on the UPS. The R3000 XR has 3 load segments, so this card will allow you to serially communicate with up to 3 servers. And the R3000 XR has 2 load segments, so you can communicate with up to 2 servers using this card.
<b>Extended Runtime Module (ERM), R3000 XR</b>	The UPS R3000 XR supports up to two Extended Runtime Modules. Each module is 2U (3.5 inches), a rack mountable battery module that extends your overall battery runtime.

## Related Options

<b>Optional SNMP/Serial Port Card</b>	Ideal for networked environments, this option card enables network administrators to remotely diagnose, monitor and reboot network devices via SNMP.	192189-B21
<b>Optional Six Port Card</b>	This option card lets you communicate (via standard DB-9 serial ports) with multiple servers. The maximum number of servers that can be connected using this card depends on the number of load segments available on the UPS. The R3000 XR has 3 load segments, so this card will allow you to serially communicate with up to 3 servers. And the R3000 XR has 2 load segments, so you can communicate with up to 2 servers using this card.	192185-B21
<b>Extended Runtime Module (ERM), R3000 XR</b>	The UPS R3000 XR supports up to two Extended Runtime Modules. Each module is 2U (3.5 inches), a rack mountable battery module that extends your overall battery runtime.	192188-B21

### UPS R3000 XR Model Matrix

Part Number	Operating Voltage Settings	Power Out (VA/Watts)	Input Connection	Output Connection
<b>Low-Voltage Models</b>				
192186-001	120V(1)	2880/2700	NEMA L5-30P	(1)L5-30R; (6) 5-15R
192186-291	100V(1)	2400/2250	NEMA L5-30P	(1) L5-30R; (6) 5-15R
<b>High Voltage Model</b>				
192186-002	208V(2)	3000/2700	NEMA L6-20P	(1) L6-20R; (9) IEC 320-C13
192186-B31	230V(3)	3000/2700	Detachable* Cord with country-specific plug	(1) IEC320-C19; (9) IEC 320-C13
192186-B32	230V(3)	3000/2700	16A IEC309 Plug	(1) IEC320-C19; (9) IEC 320-C13
192186-B33	230V(3)	3000/2700	16A CEE 7/7 SCHUKO Plug	(1) IEC320-C19; (9) IEC 320-C13
192186-AR1	230V(3)	3000/2700	16A BS-546 Plug	(1) IEC320-C19; (9) IEC 320-C13
192186-292	200V(2)	3000/2700	NEMA L6-20P	(1) L6-20R; (9) IEC 320-C13

1. User selectable for 100, 110, 120, 127V via front panel
2. User selectable for 200, 208, 220, 230, 240V via front panel
3. User selectable for 208, 220, 230, 240V via front panel

**\*NOTE:** This model with the detachable cord can be used only in applications where the total leakage current is less than 3.5 mA.

<b>Kit Contents</b>	HP UPS R3000 XR HP Power Management Software CD Power Products Documentation CD Depth adjustable fixed rack mounting rails, mounting brackets, cord retention clips Communications cable Additional IEC to IEC jumper cords with high voltage models
<b>Unit Dimensions</b>	3.50 x 19.0 x 24.5 in / 89 x 483 x 622 mm
<b>Shipping Dimensions</b>	14 x 32 x 38.5 in / 356 x 813 x 978mm
<b>Unit Weight</b>	82 lbs/37 kg
<b>Shipping Weight</b>	105 lbs/48 kg

## Technical Specifications

<b>Electrical Input</b>	Voltage Range	100, 120 and 230V models. See Model Matrix for nominal and user selectable voltage settings
	Frequency	50/60 Hz
	Input Plug	See Model Matrix
	Online Efficiency	95%
	Surge Suppression	High Energy 6500A peak
	REPO	Remote Emergency Power-Off disables AC power to load
<b>Electrical Output</b>	Online Regulation	-10% to +6% of nominal voltage
	On battery Regulation	±5% of nominal voltage
	Voltage Wave Form	Sine wave
	Connections	See Model Selection Matrix; divided into 3 Load Segments
	Output Protection	Re-settable circuit protectors
<b>Battery</b>	Type	Maintenance-free, sealed, valve-regulated lead acid (VRLA)
	Extended Batteries	One ERM with two battery strings
	Backup Time	See Backup Times Chart
	Recharge Time	<3 hours to 80% usable capacity; <24 hours for complete recharge
<b>Communications</b>	Serial Ports	Standard DB-9 ports (ships with communication cable)
	Option Slot	One
	Option Cards	Six Port Card and SNMP / Serial Port Card
	LED Indicators	LED and switch membrane integrated into the front panel; with four-button control (three buttons for UPS power control and one button under the front bezel for configuration).
<b>Environmental and Safety</b>	Operating Temperature	50° to 104° F (10° to 40° C)
	Transit Temperature	-13° to 131° F (-25° to 55° C)
	Storage Temperature	32° to 77° F (0° to 25° C)
	Humidity (Operation)	20% to 80% (non-condensing)
	Humidity (Non-operating)	5% to 95%
	Operating Altitude	Up to 6,562 ft (2000 m) above sea level
	Transit Altitude	49,212 ft (15,000 m) above sea level
	Audible Noise	<46db (at 1m from surface of unit)
	Safety Markings	FCS, UL, CSA, VDE, NEMKO, FIMKO, DEMKO, SEMKO, NOM
	Safety Certifications	UL1778; CSA22.2 No.107.1, No.107.2, No.950; CB Bulletin No.86A1; EN50091-1; EN60950; EMKO-TSE207/95; NOM-019-SCFI-1993
	EMC Markings	FCC; CISPR; VCCI; CE
	Emissions	FCC CFR 47, Part 15 Class A, EN50091-2
	Immunity	IEC 801-2, IEC 801-3, IEC 801-4, IEC 801-5
	Surge Suppression	Conforms to IEEE 587B and ANSI C62.41
	REPO Port	Meets NEC code 645-11 intent and UL requirements



## Estimated Backup Times Chart (Minutes)

Load (Percent*)	With Standby Battery (Minutes)	With Extended Runtime Module (Minutes)
20	40	120
50	12	45
80	6.5	30
100	5	20

\*NOTE: Percent of 3000VA or 2700W of load

NOTE: Backup times are estimated for typical applications. Actual performance will depend on load and battery conditions.

## Compatibility

Compatible with all HP servers, storage, racks, rack options, and other rack-mountable HP equipment (for PDU options please refer to the UPS/PDU compatibility matrix on <http://www.compaq.com/ups>).

---

© Copyright 2006 Hewlett-Packard Development Company, L.P.  
The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.