

### Overview

#### HPE G2 Enterprise Series Racks


HPE G2 Enterprise Series Racks are designed for high density IT configurations deployed in a diverse set of environments – from the data closet to the data center. Following EIA-310 specifications for 19-inch racks, G2 Enterprise Racks are designed specifically to support a wide range of HPE IT equipment (servers, storage, and networking), as well as the entire portfolio HPE Rack and Power Infrastructure solutions (PDU, UPS and KVM).

All HPE G2 Enterprise Series Racks are supported with a 10 year limited warranty that provides either repair or complete replacement of the rack. Offering this industry-leading warranty requires a highly reliable and durable design that includes features such as a fully-welded, roll-form rack design, heavy-gauge rails, and heavy-duty castors that can support a static load of up to 3000 lbs. Additionally, select shock pallet models include packaging specifically designed to support the shipment of pre-configured racks with up to 3,000 lbs. of IT equipment.

The G2 Enterprise Series Rack portfolio includes a wide range of rack models covering a variety of heights, widths, and depths. All HPE G2 rack models are supported with a large portfolio of accessories that help customize each rack to operate optimally in the user's IT environment. Rack accessories include options to support airflow management, cable management, and added rack stability.



## Overview

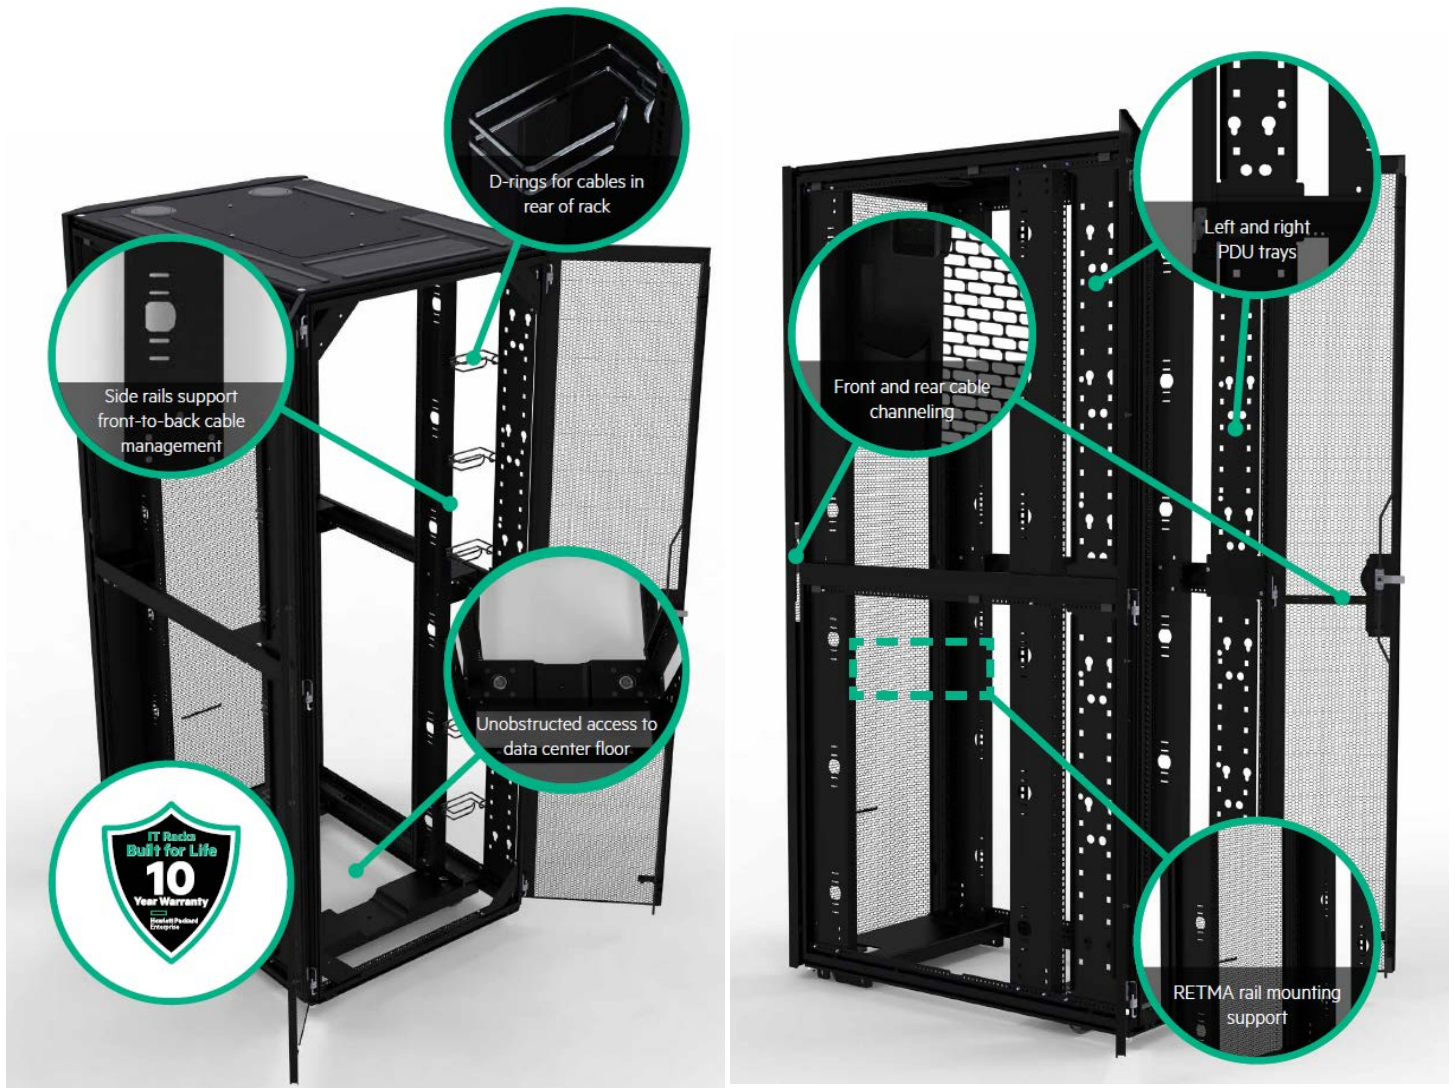

## Rack Models

### HPE G2 Enterprise Series Rack Models

Review the following details to better understand the different rack models that are offered in the HPE G2 Enterprise Series rack portfolio.

#### Pallet Rack

Standard pallet and packaging for racks that will be configured on-site

#### Shock Pallet

Pallet and packaging designed to support racks that will be shipped directly to the data center fully configured

- Can support up to 3,000 lbs. of IT equipment during shipment
- Packaging includes integrated ramp to simplify rack deployment
- Must be selected when requesting HPE Factory Express Services

#### Network Racks

Designed to support dense Networking equipment configurations, or the integration of Networking, Server, and Storage equipment into a single industry standard 19" rack.

- Front and rear vertical EIA rails are moved back 75mm to facilitate front to rear cabling
- Include additional bristle covered cable access slots in the front and top of the rack to prevent the mixing of hot and cold air and to allow pass-through for large cable connectors and bundles

---

### HPE Racks SKUs

#### 600mm Wide G2 Enterprise Series Rack Models

HPE 42U 600mmx1075mm G2 Enterprise Pallet Rack	P9K37A
HPE 42U 600mmx1075mm G2 Enterprise Shock Rack	P9K38A
HPE 42U 600mmx1200mm G2 Enterprise Pallet Rack	P9K39A
HPE 42U 600mmx1200mm G2 Enterprise Shock Rack	P9K40A

#### 800mm Wide G2 Enterprise Series Rack Models

HPE 42U 800mmx1075mm G2 Enterprise Pallet Rack	P9K41A
HPE 42U 800mmx1075mm G2 Enterprise Shock Rack	P9K42A
HPE 42U 800mmx1200mm G2 Enterprise Pallet Rack	P9K45A
HPE 42U 800mmx1200mm G2 Enterprise Shock Rack	P9K46A

#### 600mm Wide G2 Enterprise Series Rack Models

HPE 48U 600mmx1075mm G2 Enterprise Shock Rack	P9K50A
HPE 48U 600mmx1200mm G2 Enterprise Pallet Rack	P9K51A
HPE 48U 600mmx1200mm G2 Enterprise Shock Rack	P9K52A

#### 800mm Wide G2 Enterprise Series Rack Models

HPE 48U 800mmx1075mm G2 Enterprise Shock Rack	P9K54A
HPE 48U 800mmx1200mm G2 Enterprise Shock Rack	P9K58A

#### G2 Enterprise Series Network Rack Models

HPE 42U 800mmx1200mm G2 Enterprise Shock Network Rack	P9K48A
---	--------

## Standard Features

Rackable/Useable Area				Total Area		
Model	Height	Width	Depth	Total Cabinet Area	Shipping Dimensions	
P9K43A	42U	800mm	1075mm	78.98 x 44.30 x 31.34 in (200.66 x 112.52 x 79.78 cm)	85.35 x 50.87 x 43.43 in (216.79 x 129.20 x 110.31 cm)	
P9K48A	42U	800mm	1200mm	78.98 x 51.19 x 31.34 in (200.66 x 130.02 x 79.78 cm)	85.35 x 57.87 x 43.43 in (216.79 x 146.99 x 110.31 cm)	
P9K50A	48U	600mm	1075mm	90.39 x 44.30 x 23.54 in (229.78 x 112.52 x 59.78 cm)	97.64 x 50.87 x 35.43 in (248.01 x 129.20 x 89.99 cm)	
P9K51A	48U	600mm	1200mm	90.39 x 51.19 x 23.54 in (229.78 x 130.02 x 59.78 cm)	97.64 x 57.87 x 35.43 in (248.01 x 146.99 x 89.99 cm)	
P9K52A	48U	600mm	1200mm	90.39 x 51.19 x 23.54 in (229.78 x 130.02 x 59.78 cm)	97.64 x 57.87 x 35.43 in (248.01 x 146.99 x 89.99 cm)	
P9K54A	48U	800mm	1075mm	90.39 x 44.30 x 31.34 in (229.78 x 112.52 x 79.78 cm)	97.64 x 50.87 x 43.43 in (248.01 x 129.20 x 89.99 cm)	
P9K55A	48U	800mm	1075mm	90.39 x 44.30 x 31.34 in (229.78 x 112.52 x 79.78 cm)	97.64 x 50.87 x 35.43 in (248.01 x 129.20 x 89.99 cm)	
P9K57A	48U	800mm	1200mm	90.39 x 51.19 x 31.34 in (229.78 x 130.02 x 79.78 cm)	97.64 x 57.87 x 35.43 in (248.01 x 146.99 x 89.99 cm)	
P9K58A	48U	800mm	1200mm	90.39 x 51.19 x 31.34 in (229.78 x 130.02 x 79.78 cm)	97.64 x 57.87 x 43.43 in (248.01 x 146.99 x 110.31 cm)	
P9K60A	48U	800mm	1200mm	90.39 x 51.19 x 31.34 in (229.78 x 130.02 x 79.78 cm)	97.64 x 57.87 x 43.43 in (248.01 x 146.99 x 110.31 cm)	

Model	Rack Height	Rack Weight (lbs)	Shipping Weight (lbs)	Static Load	Dynamic (Rolling) Load	Dynamic (Shipping) Load
P9K43A	42U	293.44 (133.10 kg)	326.50 (148.10 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K48A	42U	303.14 (137.50 kg)	522.50 (237.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K50A	48U	252.43 (114.50 kg)	443.13 (201.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K51A	48U	272.27 (123.50 kg)	304.24 (138.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K52A	48U	274.46 (124.50 kg)	480.61 (218.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K54A	48U	304.24 (138.00 kg)	509.27 (231.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K55A	48U	302.03 (137.00 kg)	335.10 (152.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K57A	48U	319.67 (145.00 kg)	540.13 (245.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K58A	48U	321.88 (146.00 kg)	542.34 (246.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K60A	48U	321.88 (146.00 kg)	542.34 (246.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)

## Standard Features

### What's Included With Rack?

- Hardware Kit (including key to front and rear doors)
- Support documentation

**NOTE:** Side panels and baying kit must be purchased separately for all G2 Enterprise rack models.

---

### Compatibility

- Designed to EIA-310 specifications for industry standard racks
  - Designed for HPE IT solutions
  - Integration with HPE rack and power infrastructure solutions
  - Includes adjustable EIA rails
- 

### Reliability/ Durability

- 10 year limited warranty. Hardware replacement and repair is available for ten years from date of purchase.
  - Proven frame design, heavy-gauge mounting rails, and heavy-duty casters can support up to 3000 lbs. static load and dynamic (rolling) loads.
  - Highest levels of ship-load testing to ensure a dynamic load of up to 3000 lbs. when selecting a shock pallet rack option
  - Fully-welded, roll form rack frame
  - High-strength steel side bracing
- 

### Usability/ Management

- Industry's widest range of enclosure sizes with rack depths of 42-inches or greater
  - Multiple 800mm wide rack models including Network rack models available
  - Includes either 2 (1075mm models) or 4 (1200mm models) integrated and adjustable full-height PDU Mounting Trays in each rack to support PDU and cable management accessories
  - 80% front-door airflow perforation
  - Removal and reversible rack canopy with pre-installed brush strips capable of supporting easy pass-through of large cables and connectors
  - Enhanced front and rear door cabling channels
  - Redesigned bottom area designed for unobstructed access to data center floor
  - Depth adjustable, side EIA mounting rails designed to support front-to-back cabling
  - Flush-mounted, locking 2-piece side panels (optional) – supports baying with side panels installed
  - Quick release front and rear doors
  - Wide array of rack accessories for airflow management, cable management, stabilization, and safety/security
  - Eyebolt support integrated into enclosure frame
  - Configuration services through HPE Factory Express
- 

### Safety/Security

- Industry standard lock panel on the front and rear doors capable of supporting a wide range of third-party electronic locking/security solutions
  - Flush-mounted side panels that support rack baying when installed
  - Optional electrical grounding covering frame and components
  - Single key access for front doors, rear doors, and side panels
-

## Standard Features

### Industry Standards Compliance

<b>EIA</b>	Type A cabinet per section 4.1.1
<b>UL/CES Certification</b>	Yes
<b>WEEE</b>	Yes
<b>RoHS compliant</b>	Yes
<b>TAA compliant</b>	Compliant for all rack models sold in North America

---

## Service & Support

### Warranty / Service Coverage

HPE G2 Enterprise Racks are covered by a global 10 warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware replacement and repair is available for ten years from date of purchase. Normal HPE warranty exclusions apply.

Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V-10xE3rvbq>

---

### HPE Support Services

#### HPE Services

To help streamline implementation and enhance ongoing support of rack solutions, Hewlett Packard Enterprise provides cost-effective service options with resources and specialized expertise to complement customers' in-house capabilities.

#### Installation and Startup services

Take advantage of complete installation and implementation support-including global rollout capabilities-to get rack solutions up-and-running rapidly, with minimal business disruption.

#### Server Option Hardware Support

Cover rack options with a single convenient service package. HPE Support Services for rack-mounted ProLiant DL servers and storage products provide support for all HPE-branded rack hardware options that are qualified for inclusion with the server at the time of or after purchase. This covers all rack and power infrastructure options including power distribution units (PDU), UPS options up to 12kVA (not including battery), rack and rack accessories, and KVM consoles and switches. All of these products are covered at the same service level and for the same period as the server at no additional cost.

HPE Support Services help increase uptime and productivity with rapid response on a 24x7 or 13x5 basis. Both options feature same-day, 4-hour onsite assistance when service issues cannot be resolved remotely. And both help enhance the return on server investment with proven HPE Services expertise and consistent support levels across geographically dispersed sites.

## Related Options

Hewlett Packard Enterprise offers a full line of accessories and options that can be added to HPE Racks allowing you to customize each rack to fit your IT requirements. HPE Rack accessories include upgrades such as side panels, baying kits, cable management kits, drawers, shelving, and filler panels. To build a complete rack and power infrastructure for your IT environment, Hewlett Packard Enterprise also offers a full line of options that include power distribution units (PDU), uninterruptible power systems (UPS), and KVM (keyboard, video, mouse) consoles and switches. See HPE Rack and Power Infrastructure for more complete information at: <http://www.hpe.com/info/rackandpower>

**NOTE:** 0D1 may appear after the above selected part numbers on yours sales order if factory integration is indicated.

### Rack Baying Kits

HPE G2 Rack Baying Kit P9L12A

**NOTE:** This Baying Kit is used to connect HPE G2 racks of the same U height and depth together and includes the following components: (4) 24-inch baying brackets, (4) 600mm baying brackets, and T-30 Torx screws.

HPE G2 Advanced and Enterprise Series Rack 1075mm and 1200mm Offset Baying Kit P9L19A

HPE 47U to 48U Rack Baying Kit Q7G16A

### Airflow Optimization

HPE Air Flow Optimization Kit BW930A

**NOTE:** The Airflow Optimization kit seals air gaps inside the rack, in between bayed racks, and the clearance from the floor to the rack to prevent hot and cold air from mixing thus optimizing the temperature at which the chilled air enters the racked servers.

**NOTE:** When configuring racks through Factory Express, a Rack Optimization kit will automatically ship with the rack. This kit is recommended for all other bayed rack configurations also.

### Sidewall Panel Kits

HPE G2 Rack 42U 1075mm Side Panel Kit P9L15A

HPE G2 Rack 42U 1200mm Side Panel Kit P9L16A

HPE G2 Rack 48U 1075mm Side Panel Kit P9L17A

HPE G2 Rack 48U 1200mm Side Panel Kit P9L18A

**NOTE:** HPE G2 Rack Side Panel Kits are locking, 2-piece panels that provide coverage for both sides of the rack.

**NOTE:** Side Panel kits are not included with G2 Enterprise rack models and must be purchased separately.

### Rack Stabilization Kits

HPE 600mm Rack Stabilizer Kit BW932A

HPE 600mm Heavy Duty V2 Stabilizer Kit BW961A

HPE 800mm Rack Stabilizer Kit BW933A

**NOTE:** Anti-tip stabilizer kits provide stability and support when equipment is installed, removed or accessed within the rack. Heavy Duty stabilizer kits should be used when a single racked component exceeds 200 lbs.

HPE Rack Ballast Kit 120672-B21

**NOTE:** The Ballast Kit is designed to provide additional stability and support when used with the Stabilizer Kit. It is typically used when very heavy equipment is routinely installed, removed or accessed within the rack. Compatible with HPE Advanced and Enterprise Series racks.

### Tie Down Kit

HPE Universal G2 Rack Tie Down Kit Q9V01A

**NOTE:** The Rack Tie Down Kit is used to secure the rack to the datacenter floor.

### Universal 1U Filler Panels

HPE 1U 10-pack Black Universal Filler Panel BW928A



## Related Options

HPE 1U 100-pack Black Universal Filler Panel BW929A

**NOTE:** Blanking panels are made from high grade molded plastic, and are designed to be installed without tools. The use of blanking panels is recommended to ensure proper airflow.

### Rack Shelves

HPE 10000 Rack 1U Monitor Utility Shelf 253449-B21

**NOTE:** This is a 1U fixed shelf that can be mounted at any height to place a monitor or other component within the rack. The shelf has a maximum weight capacity of 150 lbs. (68kg).

HPE 100kg Sliding Shelf 234672-B21

### Adjustable Rails

Depth Adjustable Fixed Rail Kit 332558-B21

**NOTE:** This kit contains two depth adjustable rails that allow Hewlett Packard Enterprise servers, storage, UPSs and other products to be mounted in HPE or third-party racks. Maximum weight capacity is 300 lbs. (136 kg).

### Rack Light Kit

HPE Rack LED Light Kit BW939A

**NOTE:** The Rack Light Kit is mounted under the roof of the rack and is used to illuminate the rear section of the rack. The light is turned on and off with the opening and closing of the rear doors.

### Locking Drawer

HPE 2U Universal Locking Drawer 361591-B21

**NOTE:** This rack accessory mounts on HPE Advanced and Enterprise Series racks with sliding rails and is used to store CD's, instruction manuals, tools, and any other items that are frequently used at the rack. Drawer includes lock.

### Cable Management Kits

HPE Quarter Turn Hook and Loop 10 Pack Kit BW963A

HPE Quarter Turn Hook and Loop 100 Pack Kit BW964A

**NOTE:** Quarter turn hook and loop straps help attach cables and other devices to the accessory bracket in the rear of the rack without tools.

HPE G2 Cable Management D-ring Kit Q9V02A

**NOTE:** This kit consists of 10 "D" rings that can be used for cable management.

HPE Rack Cable Management Velcro Clips 379820-B21

HPE G2 Rack Cable Management Combo Kit Q9V03A

**NOTE:** The HPE Rack Cable Management Combo Kit includes a 1U and 2U front cable entry panel with brush inserts, 2x crossover cable brackets, 10x D-rings, 10x hook and loop straps (8 inch), 10x hook and loop straps (10 inch), and mounting hardware.

### Rack Fan Kits

HPE 10000 Rack Roof Mount Fan (220V) Kit 257414-B21

**NOTE:** The Rack Fan Kit enhances natural convection cooling by increasing airflow in the rack.

### Grounding Kit

HPE G2 Rack Grounding Kit P9L11A

**NOTE:** The Rack Grounding Kit can be used to reduce the level of electromagnetic emissions outside the rack. The Kit includes (2) 6" Grounding Straps, (3) 14.5" Grounding Straps, (4) 6" Grounding Straps w/connectors, (4) 14.5" Grounding Straps w/connectors.

### Hardware Kit

---

## Related Options

HPE Rack Hardware Kit H6J85A

**NOTE:** The HPE Rack Hardware Kit includes 24x M6 cage nuts, 24x M6x16 T25 screws, 10x 6mm thread clip nuts, cage nut tool, and 5x Quarter turn hook and loop straps.

---

### Door Kits

HPE G2 Rack 42U 600mm Front Door Kit P9L22A

HPE G2 Enterprise Series Rack 42U 600mm Rear Door Kit P9L23A

---

### HPE Support Services

HPE Install Rack and Rack Options Service U2871E

---

### HPE Factory Express Services

HPE Hardware Customization Service HA838A1

HPE 3rd Party Hardware Install Service HA844A1

HPE Customer Defined Rack Cable Labeling Service HA850A1

HPE Customer Furnished Equipment Handling Service HA851A1

HPE Rack Product Placement Service HA864A1

**NOTE:** HPE Factory Express offers a full line of services. For more information visit

<http://www.hpe.com/info/factoryexpress>.

---

## Technical Specifications

Model	Rackable/Useable Area			Total Area	
	Height	Width	Depth	Total Cabinet Area	Shipping Dimensions
P9K37A	42U	600mm	1075mm	78.98 x 44.30 x 23.54 in (200.66 x 112.52 x 59.78 cm)	84.17 x 47.24 x 27.95 in (213.79 x 120.00 x 71.00 cm)
P9K38A	42U	600mm	1075mm	78.98 x 44.30 x 23.54 in (200.66 x 112.52 x 59.78 cm)	85.35 x 50.87 x 35.43 in (216.79 x 129.20 x 89.99 cm)
P9K39A	42U	600mm	1200mm	78.98 x 51.19 x 23.54 in (200.66 x 130.02 x 59.78 cm)	84.65 x 52.92 x 27.95 in (215.00 x 139.50 x 71.00 cm)
P9K40A	42U	600mm	1200mm	78.98 x 51.19 x 23.54 in (200.66 x 130.02 x 59.78 cm)	85.82 x 57.87 x 35.43 in (218.00 x 146.99 x 89.99 cm)
P9K41A	42U	800mm	1075mm	78.98 x 44.30 x 31.34 in (200.66 x 112.52 x 79.78 cm)	84.17 x 47.24 x 35.83 in (213.79 x 120.00 x 91.00 cm)
P9K42A	42U	800mm	1075mm	78.98 x 44.30 x 31.34 in (200.66 x 112.52 x 79.78 cm)	85.35 x 50.87 x 43.43 in (216.79 x 129.20 x 110.31 cm)
P9K45A	42U	800mm	1200mm	78.98 x 51.19 x 31.34 in (200.66 x 130.02 x 79.78 cm)	84.17 x 54.84 x 35.83 in (218.80 x 139.30 x 91.00 cm)
P9K46A	42U	800mm	1200mm	78.98 x 51.19 x 31.34 in (200.66 x 130.02 x 79.78 cm)	85.35 x 57.87 x 43.43 in (216.79 x 146.99 x 110.31 cm)

**Understanding rack weights and loads** HPE G2 Enterprise Series Racks are designed to support high capacity weight loads that include the weight of the rack and all the equipment installed. Weight loads are defined as:

- Shipping Weight - rack including shipping packaging and materials.
- Static Load – maximum loaded weight that a rack can support when stationary.
- Dynamic Load (Rolling) – maximum loaded weight a rack can support when rolled.
- Dynamic Load (Shipping) – maximum loaded weight a rack can support when shipped configured with IT equipment

HPE G2 Enterprise Series Racks are rated for Static Loads of up to 3000 lbs. If you require a rack that can be shipped when fully loaded with equipment, please consider purchasing a Shock Pallet model that can support up to 3,000 lbs. during shipment.

Model	Rack Height	Rack Weight (lbs)	Shipping Weight (lbs)	Static Load	Dynamic (Rolling) Load	Dynamic (Shipping) Load
P9K37A	42U	228.18 (103.50 kg)	257.94 (117.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K38A	42U	230.38 (104.50 kg)	421.08 (191.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K39A	42U	249.12 (113.00 kg)	281.09 (127.50 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K40A	42U	251.33 (114.00 kg)	456.36 (207.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K41A	42U	293.44 (133.10 kg)	326.50 (148.10 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K42A	42U	295.66 (134.10 kg)	499.57 (226.60 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)
P9K45A	42U	300.93 (136.50 kg)	336.20 (152.50 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	
P9K46A	42U	303.14 (137.50 kg)	522.50 (237.00 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)	3,000 lbs. (1,361 kg)

## Technical Specifications

### Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

---

## Summary of Changes

Date	Version History	Action	Description of Change
02-Apr-2019	Version 9	Changed	Related options section was updated Obsolete SKUs were removed.
03-Dec-2018	Version 8	Changed	Related options section was updated
15-Oct-2018	Version 7	Changed	Technical Specification was updated
01-Oct-2018	Version 6	Changed	Technical Specifications & Related Options sections were updated
02-Jul-2018	Version 5	Changed	Related Options Section was updated
05-Feb-2018	Version 4	Changed	Rack Models, Standard Features and Technical Specifications were updated.
07-Aug-2017	Version 3	Added	Added new Baying kits and Door kits.
		Changed	Related Options section was revised.
05-Jun-2017	Version 2	Changed	Overview and Technical Specifications were revised. Product images were updated.
27-Mar-2017	Version 1	Added	New QuickSpecs.



© Copyright 2019 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a00002907enw - 15862 - Worldwide - V9 - 02-April-2019