

### Overview

#### HPE Composable Fabric FM 3180

The HPE Composable Fabric FM 3180 is a top-of-rack (TOR) connectivity module that delivers the next generation of innovative networking solutions designed to meet the growing needs of today's virtual and highly dynamic data center and cloud environments. Specifically designed to support scale-out applications with high performance east/west traffic needs, Composable Fabric provides an easily scalable and automated Fabric solution for diverse application workloads.

HPE Composable Fabric FM 3180 provides a cost effective 1U solution for intensive Big Data or Agile IT workload environments. The FM 3180's industry standard architecture uses Ethernet switching to create a high performance, resilient, low latency and scalable data center network fabric. Composable Fabric connectivity modules can be deployed as a single tier, eliminating cost and complexity while vastly reducing operational overhead while creating true fabric agility to support dynamic workload needs. In conjunction with Composable Fabric Manager; a centralized management, visualization and control platform, the solution streamlines operations and dynamically aligns network resources to the demanding workload and data requirements of the modern data center.



HPE Composable Fabric FM 3180

#### Key Features

- 1 RU form factor
- 48xSFP28 (25 GbE) and 8xQSFP28 (100 GbE)
- Up to 800 Gbps fabric capacity
- Up to 1.4 Tbps switching capacity
- Simplified cabling with FM 1006, direct or Leaf-Spine cabling
- Redundant/hot-swappable power and fans
- Controller based architecture using Composable Fabric Manager

#### Services

- HPE Pointnext full suite of support offerings (Proactive Care and Datacenter Care).
- Remote support technology to provide 24x7 secure remote support

**NOTE:** For the best support experience, HPE Pointnext Installation Services is required and 24x7x365 support is recommended.

---

## Standard Features

### Features and Benefits

#### The Fabric Advantage

Each HPE Composable Fabric FM 3180 features variable fabric capacity using either eight QSFP28 100GbE optical interfaces delivering up to 800 Gbps of fabric capacity, or six QSFP28 delivering 600 Gbps of fabric capacity.

FM 3180 uses QSFP28 optics which when combined with an optical passive interconnect FM 1006 create a programmable and scalable mesh between rack connectivity modules that is completely controllable by software through Composable Fabric Manager. Module-to-Module cabling is greatly simplified with two connections per rack connectivity module.

---

#### Multi-Layered Network Architecture

The full potential of optical switching is unleashed by Composable Fabric's multi-layered network architecture that delivers efficient layer 1, layer 2 and layer 3 network topologies to critical application workloads. HPE Composable Fabric FM 3180 provides layer 2 and layer 3 network topologies as part of the Composable Fabric network architecture. The optical interfaces create a highly meshed, multipath network fabric with multiple direct and indirect paths between modules. HPE Composable Fabric Manager software, which understands the physical and logical network topology, as well as the application and data workload requirements, establishes a network, where individual workloads receive their own portion of the network at each network layer.

---

#### Dynamic Topologies

In conjunction with the centralized HPE Composable Fabric Manager platform, the HPE Composable Fabric provides intelligent and adaptive technology that ensures workloads always have access to the most optimal network paths. Composable Fabric Manager provides both the integration platform, as well as a set of HPE-developed API level integrations that automate workflows based on the included sensors, actions and triggers for 3rd party orchestration systems.

HPE Composable Fabric rack connectivity modules intelligently select the best network paths for workloads that have resource requirements or explicit constraints defined by the integrations.

Less sensitive workloads without explicitly defined constraints are efficiently forwarded across the available direct and indirect paths created by the network fabric.

Based on HPE residual fit algorithms, HPE Composable Fabric Manager dynamically fits non-affinitized traffic. Unlike typical multipath networks, which might utilize a maximum of 16 or 32 IP based equal cost paths between switch ports, HPE Composable Fabric Manager can intelligently select from hundreds of non-interfering, nonequal paths across the highly diverse HPE Composable Fabric at layer 1, 2 or 3. As a result, HPE creates unprecedented efficiency, delivering higher performance with greater flexibility than traditional access/aggregation/core hierarchical networking solutions.

---

#### Scale Out, Not Up

HPE Composable Fabric FM 3180 physically interconnect using its QSFP28 ports to create a very dense, full or partial mesh between rack connectivity modules. This creates a more cost effective and power efficient network architecture than traditional tree or leaf-and-spine hierarchical networks can achieve. The mesh architecture enables linear scaling, with each additional switch adding fabric capacity, resiliency and multi-path options. HPE Composable Fabric connectivity modules create network fabrics ranging from a few server racks in size to a large capacity cloud data center. The linear build-out offers predictable economics and capacity growth in true scale-out fashion.

---

#### Leaf and Spine Compatibility

Composable Fabric delivers a unique fabric design that is not constrained by the legacy aggregation and spine boundaries, however if the traditional leaf and spine network design is required FM 3032Q rack connectivity module can be configured in a spine configuration providing full 32 port, 3.2Tbit/sec spine capacity using FM 3180 or other rack connectivity modules as leaves. Whichever configuration is chosen Composable Fabric conforms to the LS protocols (pass-thru mode) and can be connected to the existing network infrastructure.

---

#### Latest Switching Technology

## Standard Features

HPE Composable Fabric FM 3180 are based on the latest available commercial switching technology providing line rate forwarding. It provides up to 288,000 MAC table entries, 324,000 IPv4 and 168,000 IPv6 routing entries, sub 500 nanosecond L2 and L3 switching latency, full Data Center Bridging support and increased packet buffer allocation capabilities leading to improved congestion performance. This leading-edge silicon technology also provides full support for VXLAN and NVGRE overlay networks, with the ability to perform overlay to traditional network gateway functions, as well as optimized packet distribution algorithms based on VXLAN and NVGRE packet formats.

### Fabric Deployments


HPE Composable Fabric delivers very flexible deployment models. Composable Fabric's deployments involve QSFP ports whose location and the amount varies per rack connectivity module's flavor. These ports connect to QSFP ports on another connectivity module for a direct connect, alternatively leaf and spine configuration can be created where FM 3032Q acts as a spine module. For simplified cabling and where there are more than 6 connectivity modules involved, FM 1006 is used

HPE Composable Fabric FM 3180 network deployments involve the eight QSFP28 ports that are located at the right side of I/O end of the module. These ports connect to an FM 1006 interconnect or to QSFP ports on another FM 3180 for a direct connect network:

- Direct Connect for four FM 3180 modules or less.
  - Directly connect FM 3180 modules together using a QSFP28-to-QSFP28 cable such as a Direct Attach Cable (DAC) or Active Optical Cable (AOC). Avoid directly connecting FM 3180 modules in a network if the deployment is expected to grow beyond four switches.
- Optical-based FM 1006 passive solution for six FM 3180 modules or more.
  - Connect all FM 3180 modules to an FM 1006 passive interconnect module. Plug each FM 3180 into the FM 1006 using the HPE-supplied cable. The passive FM 1006 device creates the mesh structure of an HPE Composable Fabric. .

### HPE FM 3180 QSFP28 Port Diagram

In the diagram, the QSFP28 ports include a label indicating direction (W1 through W4 and E1 through E4). These labels are for informational purpose and are not found on the HPE Composable Fabric FM 3180 chassis.

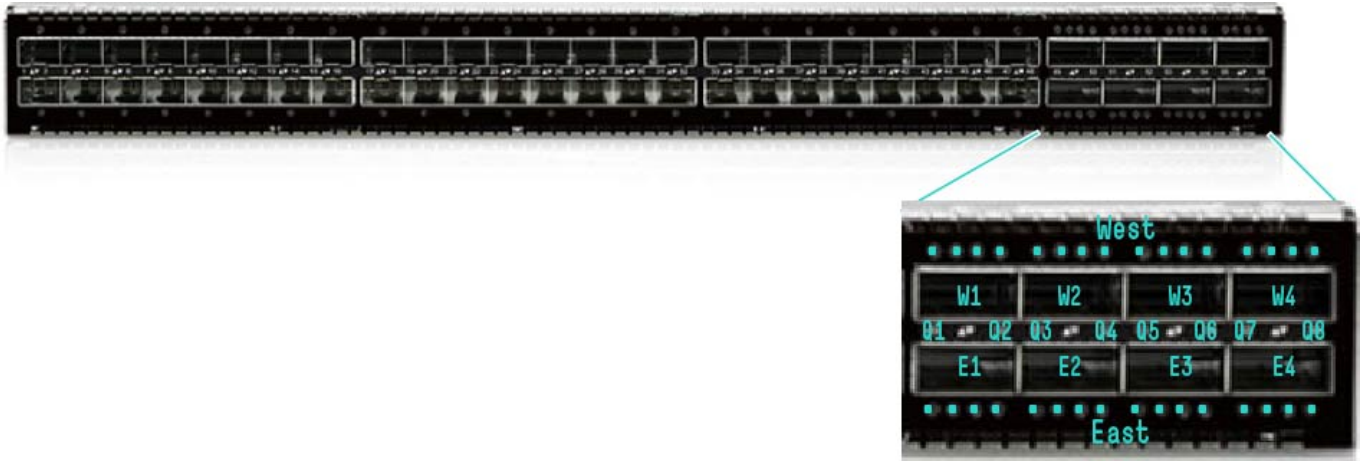

**FM 3180 QSFP28 Port Diagram**

### Fabric Capacity

- 800Gbps: 8 x QSFP28 (100GbE) – 8x100GbE
- 600Gbps: 6 x QSFP28 (25GbE) – 24x25GbE and 2 x QSFP28 left for access ports


#### **8 x 100GbE Fabric**

48 x 25GbE Access (1.5:1 OSR)  
48 x 10GbE Access (0.6:1 OSR)

#### **24 x 25GbE Fabric**

48x25GbE + 2x100GbE Access (2.3:1 OSR)  
48x10GbE (0.8:1 OSR)

## Standard Features

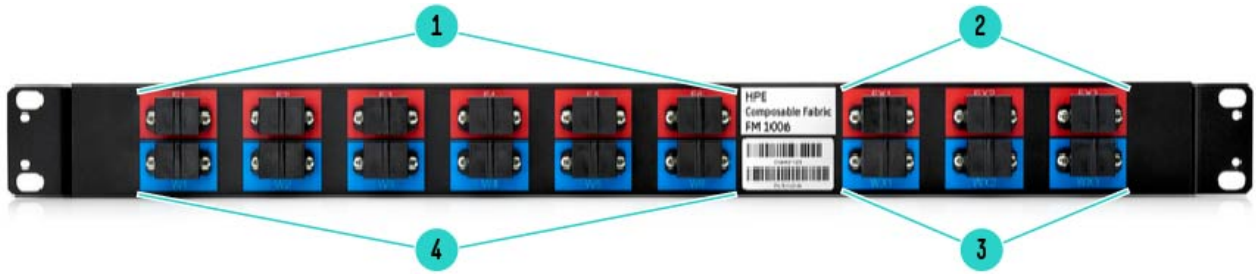

### HPE Composable Fabric FM 1006 - Port Names

- |    |                                   |    |                                   |
|----|-----------------------------------|----|-----------------------------------|
| 1. | East Fabric Ports (From 1 to 6)   | 3. | West Extender Ports (From 1 to 3) |
| 2. | East Extender Ports (From 1 to 3) | 4. | West Fabric Ports (From 1 to 6)   |



### HPE Composable Fabric Rack Connectivity Module – Access Ports

- |    |                   |    |                   |
|----|-------------------|----|-------------------|
| 1. | West Access Ports | 2. | East Access Ports |
|----|-------------------|----|-------------------|


## Standard Features

### HPE Composable Fabric Port Naming Convention

#### Direct Fabric Interconnect

Direct fabric interconnect configuration with FM 3180 rack connectivity modules.

Directly connect up to six FM 3180 modules together using a QSFP28-to-QSFP28 cable such as a Direct Attach Cable (DAC) or Active Optical Cable (AOC).

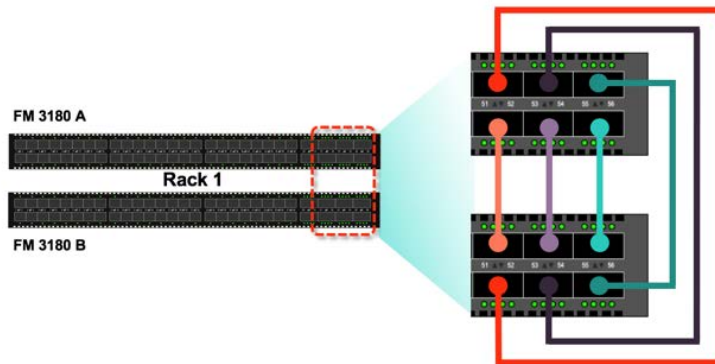

#### Optical Cables


- HPE 100 Gb QSFP28 to QSFP28 Direct Attach Copper Cable or
- HPE 100 Gb QSFP28 to QSFP28 Active Optical Cable

### Leaf and Spine Deployment \*

**NOTE:** General Availability March 2019

When fabric manager computes the tree topologies for the modules, it uses 'proof by contradiction' to guarantee those trees are loop free which allows modules to be wired arbitrarily, including mesh and Leaf and Spine configurations. Leaf and Spine configuration involves FM 3032Q\* that acts as a spine module.

- Directly connect FM 3032Q to the QSFP28 ports of other rack connectivity modules (e.g. FM 3180/3032Q etc.). Use a QSFP28-to-QSFP28 cable such as a Direct Attach Cable (DAC) or Active Optical Cable (AOC).

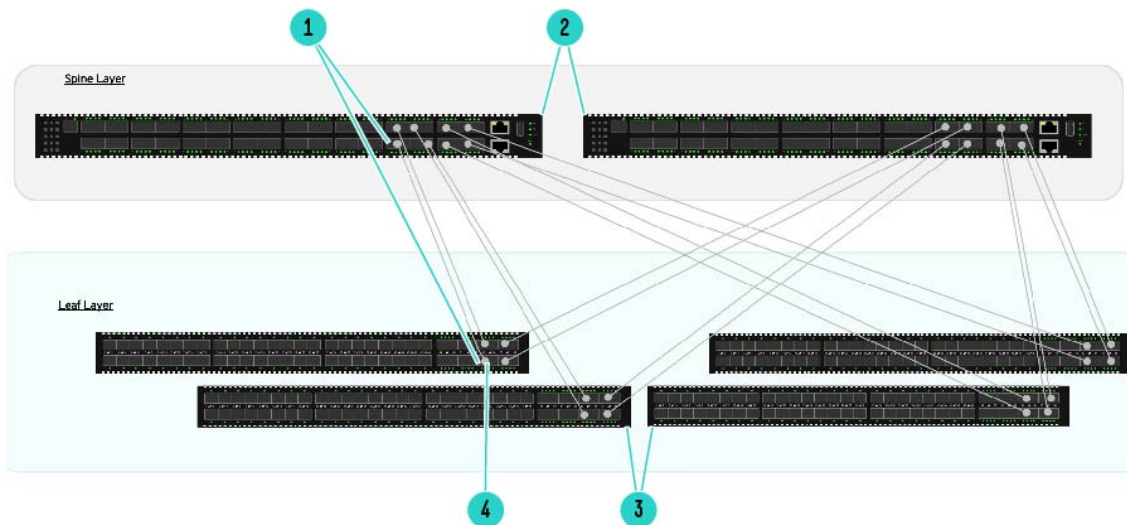

**Spine and Leaf Configuration**

- |    |   |    |   |
|----|---|----|---|
| 1. | HPE 100Gb QSFP28 LC CWDM4 2km Transceiver     | 2. | Spine Module FM 3032Q   |
| 3. | Leaf Module FM 3180/FM 3032Q/FM 3132Q/FM 2072 | 4. | HPE 100Gb QSFP28 to: QSFP28 Direct Attach Copper Cable or QSFP28 Active Optical Cable |

## Standard Features

### Fabric Interconnect with FM 1006

The FM 1006 device is a passive optical module that uses HPE Composable Fabric optical interfaces to create a meshed fabric.


Fabrics of up to six rack connectivity modules (four minimum) require connecting the modules to a FM 1006 passive interconnect.

The FM 1006 creates a meshed network between the HPE Composable Fabric rack connectivity modules, which is used by HPE Composable Fabric Manager to create forwarding topologies based on Affinities. All values of the Composable Fabric solution are preserved in this deployment. As a passive device, the FM 1006 consumes no power and as such has failure behaviors that are similar to, or better than, fiber patch panels. FM 1006s can be connected together to create larger networks.

With 3 simple MPO cables, FM 1006 can be extended to provide a single implementation of a meshed network for the attached rack connectivity modules. In increments of 6 rack connectivity modules, any sized Composable Fabric network can be created.

- Optical-based FM 1006 passive interconnect solution with simplified cabling for six rack connectivity modules or more:
  - Connect FM 3180 modules to an FM 1006 interconnect passive device. Plug each FM 3180 into the FM 1006 using the HPE-supplied cable. The passive FM 1006 device creates the mesh structure of an HPE Composable Fabric.

### Deployment with single FM 1006

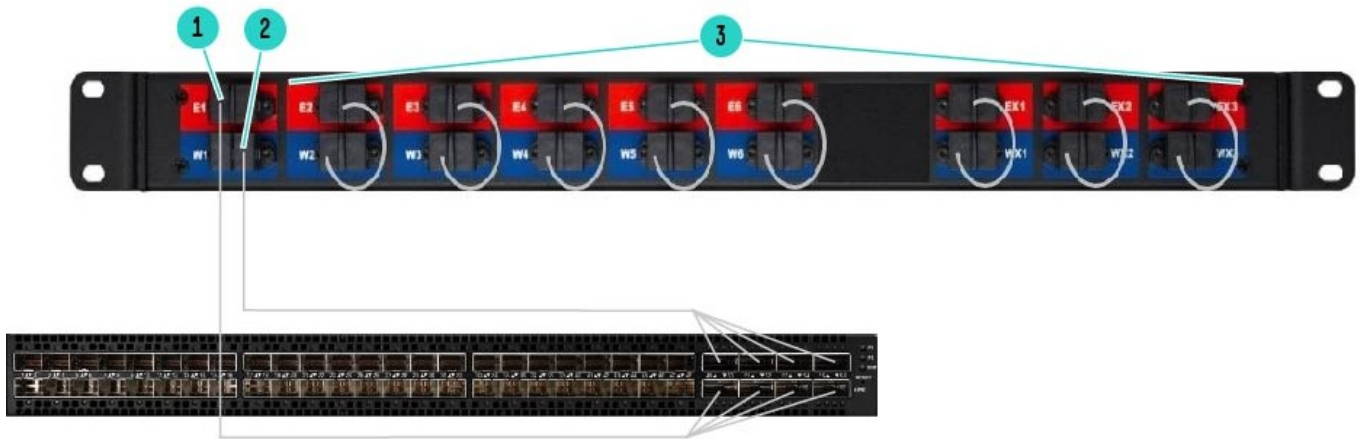


### 4 x QSFP28 Deployment – Optical Cables

- |    |   |    |                        |
|----|---|----|------------------------|
| 1. | HPE 100Gb QSFP28 LC CWDM4 2km Transceiver | 3. | HPE 24 Fiber MPO 0.25M |
| 2. | HPE 24Fiber MPO to 4xLC Single-mode       |    |                        |

## Standard Features

### Deployment with multiple FM 1006's

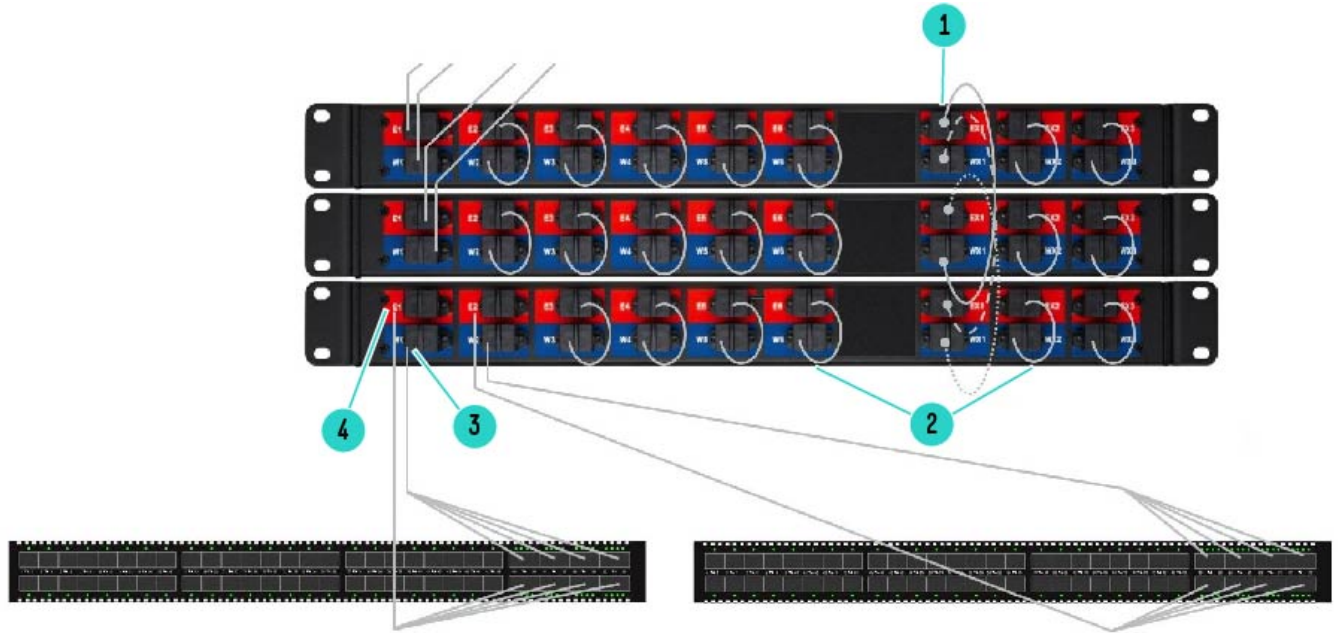

### Optical Cables

1. HPE 24 Fiber MPO
2. HPE 24 Fiber MPO 0.25M - loopback
3. HPE 100Gb QSFP28 LC CWDM4 2km Transceiver
4. HPE 24 Fiber MPO to 4xLC Single-mode

## Service and Support

Services for customers purchasing from Hewlett Packard Enterprise or an enterprise reseller are quoted using Hewlett Packard Enterprise order configuration tools.

### Technology Services for increased uptime, productivity and ROI

At HPE, our priority is to maximize your workload uptime, avoiding problems before they occur. As the experts for the HPE Composable Fabric, HPE Pointnext support will be your 24x7x 365 single point-of-contact for all of your support needs with HPE Pointnext Proactive Care Support. This means you can spend more time developing apps and adding value to the business rather than maintaining your infrastructure.

If there is a potential risk in your infrastructure, our remote support technology will proactively notify HPE and initiate the resolution process. If you are experiencing any issue with your solution, HPE Pointnext Proactive Care will provide you immediate access to our team of solution experts, whose first priority is to ensure your workloads are up and running, and then immediately start diagnosing the failure.

HPE Pointnext offers its full portfolio of support services. This includes Foundation Care, Proactive Care, Proactive Care Advanced and Datacenter Care. Flexible Capacity and Operational Support Services are also available.

HPE Composable Fabric is supported by the power of HPE, in 30+ different languages, with local presence across 140 countries.

Please consult your HPE Sales Representative for any additional questions and support options.

---

### Installation and Startup Services

HPE Pointnext provides a full set of installation and startup services to meet your unique requirements.

---

### Warranty and support

- 1-year Warranty  
See <http://www.hpe.com/networking/warrantysummary> for warranty and support information included with your product purchase.
- Software releases  
To find software for your product, refer to <http://www.hpe.com/networking/support>; for details on the software releases available with your product purchase, refer to <http://www.hpe.com/networking/warrantysummary>.

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.



## Models

### Ordering Information

#### The Composable Fabric FM 3180

HPE Composable Fabric FM 3180 8-port QSFP28 and 48-port 10/25GbE Front-to-Back Module	R1N25A
HPE Composable Fabric FM 3180 8-port QSFP28 and 48-port 10/25GbE Back-to-Front Module	R1N26A

#### HPE Composable Fabric Licenses

HPE Composable Cloud FM 3180 40-port 25GbE 3yr E-LTU	R1Q67AAE
HPE Composable Cloud FM 3180 40-port 25GbE 5yr E-LTU	R1Q68AAE
HPE Composable Cloud for ProLiant DL 2-port 25GbE 3yr E-LTU	R1Q69AAE

---

## Related Options

### Accessories

HPE Composable Fabric FM 1006 1RU Passive Module	R1N31A
HPE 24 Fiber MPO Single-mode 0.25m Cable	R1N44A
HPE 24 Fiber MPO Single-mode 3m Cable	R1N54A
HPE 24 Fiber MPO Single-mode 5m Cable	R1N53A
HPE 24 Fiber MPO Single-mode 10m Cable	R1N52A
HPE 24 Fiber MPO Single-mode 20m Cable	R1N73A
HPE 24 Fiber MPO to 3x12 Fiber MPO Single-mode 3m Cable	R1N42A
HPE 24 Fiber MPO to 3x12 Fiber MPO Single-mode 5m Cable	R1N56A
HPE 24 Fiber MPO to 4xLC Single-mode 3m Cable	R1N58A
HPE 24 Fiber MPO to 4xLC Single-mode 5m Cable	R1N59A
HPE 24 Fiber MPO to 4xLC Single-mode 10m Cable	R1N60A
HPE 24 Fiber MPO to 4xLC Single-mode 20m Cable	R1N61A
HPE 10Gb SFP+ to SFP+ 1m Direct Attach Copper Cable	ROY52A
HPE 10Gb SFP+ to SFP+ 3m Direct Attach Copper Cable	ROY53A
HPE 10Gb SFP+ to SFP+ 5m Direct Attach Copper Cable	ROY54A
HPE 40Gb QSFP+ to 4x10Gb SFP+ 3m Direct Attach Copper Cable	R1N64A
HPE 40Gb QSFP+ to QSFP+ 0.35m Direct Attach Copper Cable	ROY58A
HPE 40Gb QSFP+ to QSFP+ 1m Direct Attach Copper Cable	ROY56A
HPE 40Gb QSFP+ to QSFP+ 3m Direct Attach Copper Cable	ROY57A
HPE 40Gb QSFP+ to QSFP+ 5m Direct Attach Copper Cable	ROY59A
HPE 40Gb QSFP+ to QSFP+ 7m Active Optical Cable	R1N39A
HPE 40Gb QSFP+ to QSFP+ 15m Active Optical Cable	R1N40A
HPE 25Gb SFP28 to SFP28 3m Direct Attach Copper Cable	R1N32A
HPE 25Gb SFP28 to SFP28 5m Direct Attach Copper Cable	R1N33A
HPE 100Gb QSFP28 to QSFP28 0.5m Direct Attach Copper Cable	R1N34A
HPE 100Gb QSFP28 to QSFP28 1m Direct Attach Copper Cable	R1N35A
HPE 100Gb QSFP28 to QSFP28 3m Direct Attach Copper Cable	R1N68A
HPE 100Gb QSFP28 to QSFP28 5m Direct Attach Copper Cable	R1N69A
HPE 100Gb QSFP28 to QSFP28 7m Active Optical Cable	R1N36A
HPE 100Gb QSFP28 to QSFP28 15m Active Optical Cable	R1N37A
HPE QSFP28 to 4x25Gb SFP28 1m Direct Attach Copper Cable	R1N62A
HPE QSFP28 to 4x25Gb SFP28 3m Direct Attach Copper Cable	R1N63A
HPE QSFP28 to 4x25Gb SFP28 7m Active Optical Cable	R1N50A
HPE QSFP28 to 4x25Gb SFP28 15m Active Optical Cable	R1N51A
HPE 10GBASE-T SFP+ RJ45 30m Transceiver	ROY65A
HPE 10Gb SFP+ LC LR 10km Transceiver	ROY61A
HPE 10Gb SFP+ LC SR 300m Transceiver	ROY62A
HPE 40Gb QSFP+ MPO SR4 300m Transceiver	R1N49A
HPE 40Gb QSFP+ LC LR 10km Transceiver	R1N48A
HPE 40Gb QSFP+ MPO IR4P 500m Transceiver	R1N55A
HPE 100Gb QSFP28 PSM4 500m Transceiver	R1N45A
HPE 100Gb QSFP28 MPO SR4 100m Transceiver	R1N47A
HPE 100Gb QSFP28 LC CWDM4 2km Transceiver	R1N46A
HPE 100Gb QSFP28 LC LR 10km Transceiver	R1N94A
HPE QSFP28 to SFP28 Adapter	R1P15A

## Technical Specifications

<b>Chassis</b>	1RU Form Factor Redundant Hot Swappable Power Supplies Hot swappable fans Console, RJ45
<b>Fabric Interfaces</b>	8 x QSFP28 (100GbE) or 6 x QSFP28 (4x25GbE)
<b>Access Interfaces</b>	48 x SFP28 (10/25GbE) or 48 x SFP28 (10/25GbE) + 2 QSFP28 (4x10/4x25/1x40/2x50/1x100GbE)
<b>Fabric/Switching Capacity</b>	2.0 Tbps Up to 1 billion packets per second Line rate L2 and L3 forwarding L2/L3 Latency from 500ns
<b>Platform Software</b>	Linux ONIE
<b>Power and Cooling</b>	Under 550W peak consumption with maximum optics 1+1 redundant, hot swap PSUs 100 - 240VAC auto-ranging, 47-63Hz or, 180- 300VDC auto input 48V PSU option available 3+1 redundant fans, front to back and back to front system cooling
<b>Dimensions</b>	<b>Height:</b> 43.8 mm (1.73") 1 EIA unit <b>Width:</b> 442 mm (17.3") <b>Depth:</b> 521 mm (20.5")
<b>Altitude</b>	-60 to 3000m
<b>Temperature</b>	32°F to 104°F (0°C to 40°C)
<b>Humidity</b>	5% to 90% non-condensing
<b>Weight</b>	22.4 lbs. (10.2 Kg)
<b>Approvals</b>	<b>EMC:</b> CN(GB9254-2008), EU(EN55022, EN55024), FCC, VCCI, CCC <b>Safety:</b> IEC60950-1, GB4943, UL/CSA, CB, CCC
<b>Electrical Characteristics</b>	<b>Frequency</b> 50/60Hz <b>Voltage</b> 90 – 264 VAC <b>Maximum power rating</b> 416W <b>Idle power rating</b> 226W
<b>Memory and processor</b>	Intel Denverton 1.6Ghz Dual-core (up to 8-core), 4-32GB ECC DDR4, 16GB up to 1TB M.2 SSD
<b>Performance</b>	<b>Throughput</b> up to 2003 Mpps <b>Fabric/ Switching capacity</b> 2000 Gbps IO Bandwidth, 32M Byte Buffer <b>Routing table size</b> 324,000 entries (IPv4), 168,000 entries (IPv6) <b>Mac address table size</b> 32K min/288K max
<b>Management Services</b>	HPE Composable Fabric Manager; Command-line interface; Out-of-band management; Telnet; FTP Refer to the Hewlett Packard Enterprise website at <a href="http://www.hpe.com/networking/services">http://www.hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

## Summary of Changes

Date	Version History	Action	Description of Change:
04-Mar-2019	Version 2	Changed	Service and Support, Models and Related Options sections were updated.
04-Feb-2019	Version 1	New	New QuickSpecs



© Copyright 2019 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.  
For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.

a00047456enw - 16364 - Worldwide - V2 - 4-March-2019