


Overview

HPE Ethernet 1Gb Adapters

HPE ProLiant DL, ML & Apollo

The HPE Ethernet 1Gb adapters deliver full line-rate performance across all ports with low power consumption, providing Ethernet connectivity ideal for virtualization, security, server consolidation, and network segmentation.

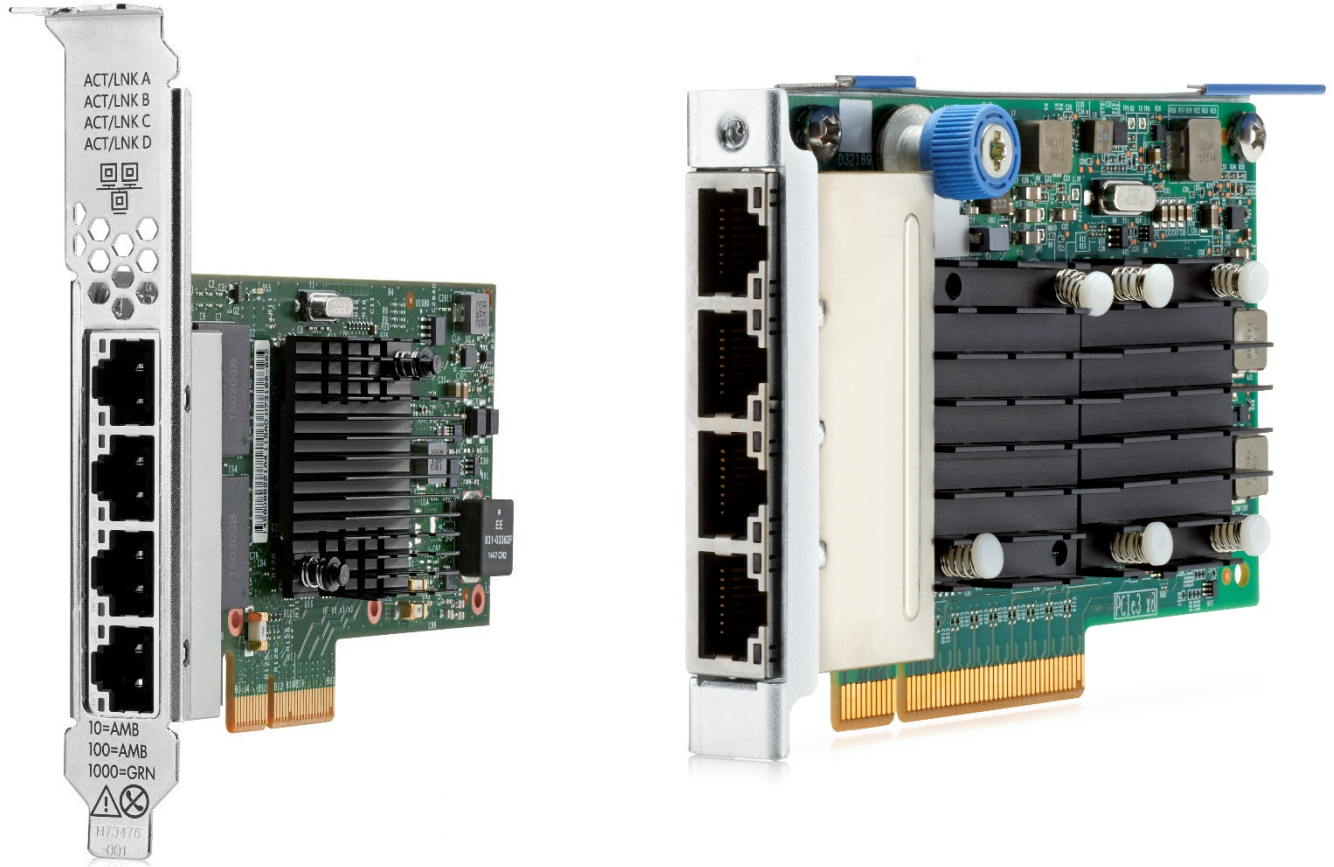

Platform Information

Models

HPE Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HPE Ethernet 1Gb 4-port 331T Adapter	647594-B21
HPE Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HPE Ethernet 1Gb 4-port 366T Adapter	811546-B21

Kit Contents Table

SKU	629135-B22	647594-B21	665240-B21	811546-B21
Description	HPE Ethernet 1Gb 4-port 331FLR Adapter	HPE Ethernet 1Gb 4-port 331T Adapter	HPE Ethernet 1Gb 4-port 366FLR Adapter	HPE Ethernet 1Gb 4-port 366T Adapter
Quick install card	√	√	√	√
Product warranty statement	√	√	√	√
Low profile bracket		√		√

Servers Support Table

SKU	629135-B22	647594-B21	665240-B21	811546-B21
Description	HPE Ethernet 1Gb 4-port 331FLR Adapter	HPE Ethernet 1Gb 4-port 331T Adapter	HPE Ethernet 1Gb 4-port 366FLR Adapter	HPE Ethernet 1Gb 4-port 366T Adapter
HPE ProLiant DL20 Gen9	√	√	√	√
HPE ProLiant DL360 Gen9		√	√	√
HPE ProLiant DL380 Gen9		√	√	√
HPE Apollo 4200 Gen9		√	√	√
HPE Apollo 6500 XL270d Gen9		√		√
HPE ProLiant DL20 Gen10				√
HPE ProLiant DL120 Gen10	√	√	√	√
HPE ProLiant DL160 Gen10	√	√	√	√
HPE ProLiant DL180 Gen10	√	√	√	√
HPE ProLiant DL325 Gen10	√	√	√	√
HPE ProLiant DL360 Gen10	√	√	√	√
HPE ProLiant DL380 Gen10	√	√	√	√
HPE ProLiant DL385 Gen10	√	√	√	√
HPE ProLiant DL560 Gen10	√	√	√	√
HPE ProLiant DL580 Gen10	√	√	√	√
HPE Apollo 2000 XL170r Gen10	√	√	√	√
HPE Apollo 2000 XL190r Gen10	√	√	√	√
HPE Apollo 4500 XL450 Gen10	√	√	√	√
HPE ProLiant ML30 Gen10		√		√
HPE ProLiant ML110 Gen10		√		√
HPE ProLiant ML350 Gen10		√		√
HPE Apollo 6000 XL230k Gen10		√		√

Standard Features

SKU	629135-B22	647594-B21	665240-B21	811546-B21
Description	HPE Ethernet 1Gb 4-port 331FLR Adapter	HPE Ethernet 1Gb 4-port 331T Adapter	HPE Ethernet 1Gb 4-port 366FLR Adapter	HPE Ethernet 1Gb 4-port 366T Adapter
Active Health System	√	√	√	√
Auto-negotiation	√	√	√	√
Configuration Utilities	√	√	√	√
DMA Coalescing				
HPE Sea Of Sensors 3D	√	√	√	√
LED Indicators	√	√	√	√
Load Balancing	√	√		
Message Signaled Interrupt (Extended) (MSI-X)	√	√	√	√
Network Adapter Teaming	√	√	√	√
Optimized for Virtualization	√	√	√	√
Preboot eXecution Environment (PXE)	√	√	√	√
TCP/UDP/IP	√	√	√	√
Precision Time Protocol (IEEE 1588 PTP)	√	√	√	√
Server Integration	√	√	√	√
VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)	√	√		
Wake-on-LAN	√			

Active Health System Supports HPE Active Health System - monitors and records changes in the server hardware and configuration enabling customers to have accurate information that will assist in diagnosing problems and delivering rapid resolution when server failures occur.

Auto-negotiation This adapter automatically senses the speed of the device to which it is attached. It also automatically configures for half or full duplex, depending on the duplex mode of the switch, hub, or router connected to the adapter.

Configuration Utilities This adapter ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

DMA Coalescing Supports DMA Coalescing, the incoming data packets and interrupts associated with these DMA calls are intelligently batched to keep the system devices in lower power states.

HPE Sea of Sensors3D Support for the HPE Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can initiate fans and make other adjustments to reduce energy usage. A significant improvement lies in the ability to apply fan speed increases only to the portion of the system that is rising in temperature, rather than all six fans in unison, which reduces the amount of energy used for cooling.

Jumbo Frames This adapter supports Jumbo Frames (also known as extended frames), permitting up to a 9,500 byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over five times the size of a standard 1500-byte Ethernet frame. With Jumbo Frames, networks can achieve higher throughput

Standard Features

performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

LED Indicators

LED indicators show link integrity and network activity for easy troubleshooting.

Load Balancing

Transmit Load Balancing (TLB) and Switch-assisted Load Balancing (SLB) are two advanced features that customers can use to build a bigger pipe for improved networking bandwidth. These port-bonding techniques enable users to install up to four dual-port HPE 361T adapters (total of 8 ports) in a HPE ProLiant server and aggregate their throughput up to a theoretical maximum of 16 Gigabits per second full-duplex transmissions.

Message Signaled Interrupt (Extended)(MSI-X)

Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores.

Network Adapter Teaming

This adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, the team of adapters can work together as a single virtual adapter, providing support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.

Network Fault Tolerance (NFT)

Network Fault Tolerance, sometimes called "failover" or "NIC Redundancy," allows for the installation of multiple server adapters so that the active device can be backed up by a redundant adapter to improve availability. The Hewlett Packard Enterprise teaming utility also allows users to specify that when a failed adapter is fixed and replaced, the original adapter resumes its function as the primary network connection.

Optimized for Virtualization

I/O Virtualization support for VMware NetQueue and Microsoft VMQ helps meet the performance demands of consolidated virtual workloads.

Preboot eXecution Environment (PXE)

Support for PXE enables automatic deployment of computing resources remotely from anywhere. It allows a new or existing server to boot over the network and download software, including the operating system, from a management/ deployment server at another location on the network. Additionally, PXE enables decentralized software distribution and remote troubleshooting and repairs.

Precision Time Protocol (IEEE 1588 PTP)

Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.

Server Integration

This adapter is a validated, tested, and qualified solution that is optimized for HPE ProLiant servers. Hewlett Packard Enterprise validates a wide variety of major operating systems drivers with the full suite of web-based enterprise management utilities including HPE Intelligent Provisioning and HPE Systems Insight Manager that simplify network management. This approach provides a more robust and reliable networking solution than offerings from other vendors and provides users with a single point of contact for both their servers and their network adapters.

TCP/UDP/IP

For overall improved system response, this adapter supports standard TCP/IP offloading techniques including: TCP/IP, UDP checksum offload (TCO) moves the TCP and IP checksum offloading from the CPU to the network adapter. Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)

VMware NetQueue is technology that significantly improves performance of 10 Gigabit Ethernet network adapters in virtualized environments. Windows Hyper-V VMQ (VMQ) is a feature available on servers running Windows Server 2008 R2 with VMQ-enabled Ethernet adapters. VMQ uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine.

Standard Features

Wake-on-LAN

This adapter provides Wake-on-LAN (WoL) support through the PCI Express bus. A system that supports Wake-on-LAN can remain available to the systems administrator during its normal downtime. Once the machine is awakened, the systems administrator can remotely control, audit, debug, or manage the machine.

Warranty

Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).

Minimum: One year limited warranty.

NOTE: Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>

Service and Support

Service and Support

NOTE: This adapter is covered under HPE Support Services/ Service Contract applied to the HPE ProLiant Server or enclosure. No separate HPE Support Services need to be purchased.

Most HPE branded options sourced from HPE that are compatible with your product will be covered under your main product support at the same level of coverage, allowing you to upgrade freely. Additional support is required on select workload accelerators, switches, racks and UPS options 12KVA and over. Coverage of the UPS battery is not included under HPE support services; standard warranty terms and conditions apply.

Warranty and Support Services

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS options 12KVA and over. Coverage of the UPS battery is not included under TS support services; standard warranty terms and conditions apply.

Protect your business beyond warranty with HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support you need for your IT and business. Protect your product, beyond warranty.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

For more information

Visit the Hewlett Packard Enterprise Service and Support [website](#).

Technical Specifications

SKU	629135-B22	647594-B21	665240-B21	811546-B21
Description	HPE Ethernet 1Gb 4-port 331FLR Adapter	HPE Ethernet 1Gb 4-port 331T Adapter	HPE Ethernet 1Gb 4-port 366FLR Adapter	HPE Ethernet 1Gb 4-port 366T Adapter
Bus Type	PCIe 2.0X4	PCIe 2.0X4	PCIe 2.0X4	PCIe 2.0
Data Rate	4 port, each at 2 Gb bi-directional, 8 Gb bi-directional per adapter	4 port, each at 2 Gb bi-directional, 8 Gb bi-directional per adapter	4 port, each at 2 Gb bi-directional, 8 Gb bi-directional per adapter	4 port, each at 2 Gb bi-directional, 8 Gb bi-directional per adapter
Form Factor	FlexibleLOM	Stand up	FlexibleLOM	Stand up
Humidity	Operating 10% to 90% non-condensing Non-operating 5% to 95% non-condensing			
IEEE Compliance	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.1q, 802.3az, 1588, 802.1as	802.3, 802.3ab, 802.3u, 802.3x, Dynamic 802.3ad, 802.1q, 802.3az, 1588, 802.1as	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.1q, 802.3az, 1588, 802.1as	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.1q, 802.3az, 1588, 802.1as, 802.1p
Jumbo Frames	9,000 KB	9,000 KB	9,500 KB	9,500 KB
Network Processor	Broadcom BCM5719 (BCM5719AOKFBG)	Broadcom BCM5719 (BCM5719AOKFBG)	Intel® I350 (I350-T4V2)	Intel® I350 (I350-T4V2)
Power	5.5W max	4.3W max 1.0W min	5.5W max	5.5W max
Temperature	Operating 0° to 55°C (32° to 131°F) Non-Operating -65° to 85° C (-85° to 185° F)			

Operating System and Virtualization Support

The Operating Systems supported by this adapter are based on the server OS support. Please refer to the OS Support Matrix at <https://www.hpe.com/us/en/servers/server-operating-systems.html>

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Technical Specifications

Models

HPE Ethernet 1Gb 2-port 332T Adapter

615732-B21

HPE Ethernet 1Gb 2-port 361T Adapter

652497-B21

Kit Contents Table		
SKU	615732-B21	652497-B21
Description	HPE Ethernet 1Gb 2-port 332T Adapter	HPE Ethernet 1Gb 2-port 361T Adapter
Quick install card	√	√
Product warranty statement	√	√
Low profile bracket	√	√

Servers Support Table		
SKU	615732-B21	652497-B21
Description	HPE Ethernet 1Gb 2-port 332T Adapter	HPE Ethernet 1Gb 2-port 361T Adapter
HPE ProLiant DL20 Gen9		
HPE ProLiant DL360 Gen9	√	√
HPE ProLiant DL380 Gen9		
HPE Apollo 4200 Gen9	√	√
HPE Apollo 6500 XL270d Gen9	√	√
HPE ProLiant DL20 Gen10	√	√
HPE ProLiant DL120 Gen10	√	√
HPE ProLiant DL160 Gen10	√	√
HPE ProLiant DL180 Gen10	√	√
HPE ProLiant DL325 Gen10	√	√
HPE ProLiant DL360 Gen10	√	√
HPE ProLiant DL380 Gen10	√	√
HPE ProLiant DL385 Gen10	√	√
HPE ProLiant DL560 Gen10	√	√
HPE ProLiant DL580 Gen10	√	√
HPE Apollo 2000 XL170r Gen10	√	√
HPE Apollo 2000 XL190r Gen10	√	√
HPE Apollo 4500 XL450 Gen10	√	√
HPE ProLiant ML30 Gen10	√	√
HPE ProLiant ML110 Gen10	√	√
HPE ProLiant ML350 Gen10	√	√
HPE Apollo 6000 XL230k Gen10	√	√

Technical Specifications

Standard Features Table		
SKU	615732-B21	652497-B21
Description	HPE Ethernet 1Gb 2-port 332T Adapter	HPE Ethernet 1Gb 2-port 361T Adapter
Active Health System	√	√
Auto-negotiation	√	√
Configuration Utilities	√	√
DMA Coalescing		√
HPE Sea Of Sensors 3D	√	√
LED Indicators	√	√
Load Balancing	√	√
Message Signaled Interrupt (Extended) (MSI-X)	√	√
Network Adapter Teaming	√	√
Optimized for Virtualization	√	√
Preboot eXecution Environment (PXE)	√	√
TCP/UDP/IP	√	√
Precision Time Protocol (IEEE 1588 PTP)	√	√
Server Integration	√	√
VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)	√	√
Wake-on-LAN		√

Technical Specifications

Technical Specifications Table		
SKU	615732-B21	652497-B21
Description	HPE Ethernet 1Gb 2-port 332T Adapter	HPE Ethernet 1Gb 2-port 361T Adapter
Bus Type	PCIe 2.0x1	PCIe 2.0
Data Rate	2 port, each at 2 Gb bi-directional, 4 Gb bi-directional per adapter	2 port, each at 2 Gb bi-directional, 4 Gb bi-directional per adapter
Form Factor	Stand up	Stand up
Humidity	Operating 10% to 90% non-condensing Non-operating 5% to 95% non-condensing	
IEEE Compliance	802.3, 802.3ab, 802.3u, 802.3x, 802.3ad, 802.1q, 802.3az, 1588, 802.1as, 802.1p	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q, 802.3az, 1588
Jumbo Frames	9,000 KB	9,500 KB
Network Processor	Broadcom BCM5720 (BCM5720A0KFBG)	Intel® Ethernet I350 Controller (I350-T2V2)
Power	2.2W max 1.7W min	3.2W min 4.2W max
Temperature	Operating 0° to 55°C (32° to 131°F) Non-Operating -65° to 85° C (-85° to 185° F)	

Summary of Changes

Date	Version History	Action	Description of Change
05-Nov-2018	Version 5	Changed	Technical Specifications Section was updated
15-Oct-2018	Version 4	Changed	Platform Information, Standard Features & Technical Specifications Sections were updated
1-Oct-2018	Version 3	Changed	Platform Information & Standard Features Sections were updated
13-Aug-2018	Version 2	Changed	Platform Information Section was Updated
02-Jul-2018	Version 1	New	New QuickSpecs



© Copyright 2018 Hewlett Packard Enterprise Development L.P. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a00047730enw - 16267 - Worldwide - V5 - 05-November-2018