


QuickSpecs

Overview

This QS has been replaced by 13258 HP StorageWorks MSL Tape Libraries

The HP StorageWorks MSL8096 Tape Library will meet a broad range of demanding data storage needs including unattended backup, archive and disaster recovery for medium to large businesses, workgroups, or remote offices. The MSL8096 offers up to 153.6 TB of compressed (2:1) storage capacity in an 8U form factor with your choice of LTO-4 or LTO-3 Ultrium Tape Drives. The library is also available with a wide choice of interfaces including Fibre Channel, SCSI and SAS. A second power supply can be added for enhanced system up-time. The MSL8096 enables you to easily manage your media both in and out of the library with a standard bar code reader and eight 12-slot removable magazines. A quarter VGA operator control panel, up to 15 configurable mail slots and a viewing window with interior illumination enable easy operator interaction with the library. With HP unique web-based remote management, the MSL8096 is easily operated, configured and managed from across the room, or across the globe.

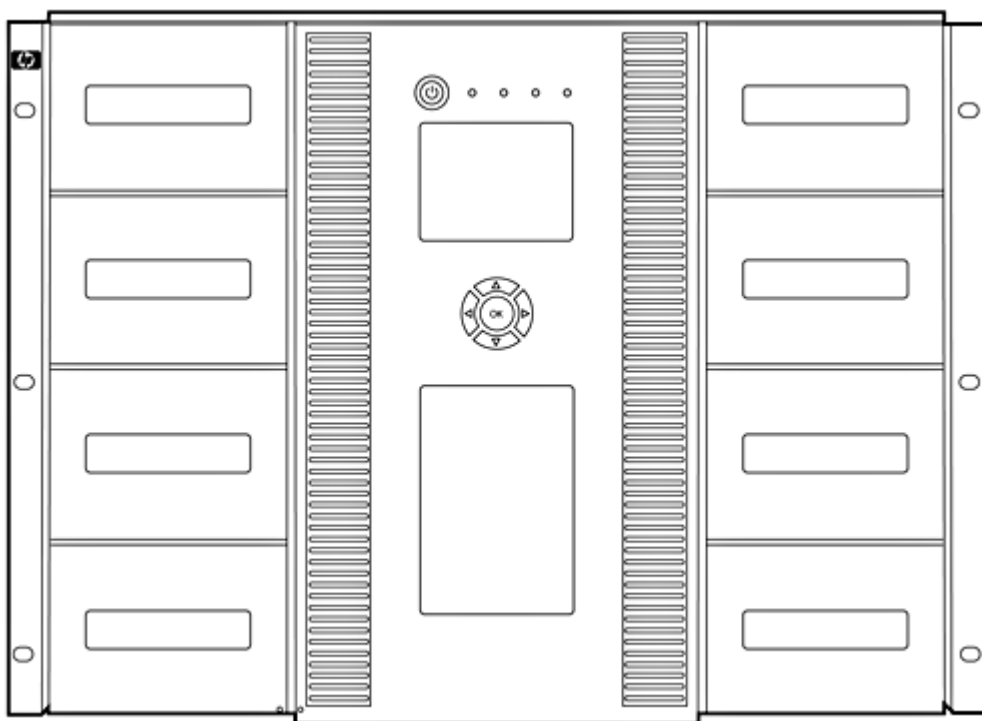

What's New

- MSL8096 Libraries pre-configured with four drives are now available.
- Two new SAS cables are available for connect to SAS servers.

QuickSpecs

HP StorageWorks MSL8096 Tape Library

Overview

Key Features

- Exceptional storage density with up to 153.6 TB of compressed capacity (2:1) in 8U
- Easy-to-use HP unique web-based remote management
- Integrated bar code reader
- Tool-free tape drive upgrades
- Customer upgradeable redundant power supply
- Multiple interface choices available (SCSI, SAS or FC)
- Removable magazines with up to 15 user-configurable mail slots
- Easy-to-enable AES 256-bit embedded hardware encryption with compression
- Extensive OS and software compatibility testing
- Proven high reliability

Customer benefits

- Provides a large amount of data storage without consuming valuable rack space.
- Manage, configure and use the library from across the room or across the globe with web-based remote management interface.
- Easily manage your media with standard bar code reader and eight 12-slot removable magazines.
- Choose from a broad range of HP LTO Ultrium Tape Drives including LTO-4 Ultrium 1840, LTO-4 Ultrium 1760, or LTO-3 Ultrium 960. . As your data protection needs change or increase, you can increase capacity and/or performance easily with tool-free drive upgrades.
- With the addition of the redundant power supply option, the user can attain, and maintain, even higher system reliability and up-time.
- SCSI, SAS and FC interfaces provide options for installing the tape library into any environment.
- For dedicated import/export of media cartridges, each library includes up to 15 user-configurable mail slots. The library also includes removable magazines for bulk loading of media. The magazines can also be used for convenient bulk storage of media off-site.
- Provides highest level of encryption security, with compression, for strong backup data privacy to secure confidential information and address compliance quickly. Encryption keys are generated and maintained by the HP StorageWorks 1/8G2 & MSL LTO-4 Encryption Kit or by supporting ISV backup applications.
- Works with industry-leading servers, operating systems and backup software.
(<http://www.hp.com/go/ebs>)
- Peace of mind knowing that the MSL8096 provides reliable backups and automatically changes tapes with a robotics rating of 2 million Mean Swaps Between Failures (MSBF).

Family Comparison	MSL8096 LTO-4 Ultrium 1840 Tape Library	MSL8096 LTO-4 Ultrium 1760 Tape Library	MSL8096 LTO-3 Ultrium 960 Tape Library
Drive Technology	LTO-4 Ultrium 1840	LTO-4 Ultrium 1760	LTO-3 Ultrium 960
Number of Drives	2 to 4	2 to 4	2 to 4
Capacity (2:1 compression)	153.6 TB	153.6 TB	76.8 TB
Maximum Data Transfer (2:1 compression)	3.4 TB/hr (four drives)	2.3 TB/hr (four drives)	2.3 TB/hr (four drives)
Drive Interface	4Gb Native Fibre Channel Ultra320 LVD SCSI	3Gb/sec SAS	4Gb Native Fibre Channel Ultra320 LVD SCSI

Product Highlights

Manageability

The MSL8096 Tape Library allows web-based remote manageability; the unit can be monitored and managed from across the room or across the globe. Functions included in the management tool include:

- Status information on the drive and system
- System configuration operations and reporting
- System error and status logs
- Library and drive firmware upgrade capabilities
- Diagnostic tests and information
- Cartridge movement for maintenance and management purposes
- Cleaning cartridge support
- Security and access control
- SNMP support for IP communication
- Partitioning and Encryption management

Easy Installation

The MSL8096 Tape Library is shipped as a rack-ready unit. The rack mount hardware included with the library allows installation in a variety of HP racks which include the 10000 series, 9000 series, 5000 series or System/E racks.

Partitioning

The MSL8096 now includes the ability to be configured as a partitioned library. The MSL8096 may be configured as up to one partition per drive; four partitions if four drives are installed. Partitioning allows each partitioned library to be presented to the host as an independent library, separate from other partitions in the library. Hosts for each partition own independent sets of media and can use ISV software that is different from the other partitions allowing maximum flexibility and utilization of the MSL8096.

Proven Reliability

With a rating of 2,000,000 robot load/unload cycles, the MSL8096 Tape Library provides necessary high reliability for today's demanding environment. To improve reliability and longevity, all HP Ultrium products feature Data Rate Matching (DRM). This allows the tape drive to dynamically and continuously adjust the speed of the drive, to match the speed of the host or network. This increases performance, reduces mechanical wear on the tape drive and extends tape life.

Data Privacy

To greatly enhance data privacy, HP StorageWorks MSL8096 Tape Libraries are now available with LTO-4 Ultrium hardware encrypting tape drives for secure high performance backups meeting consortium specifications for LTO-4. HP Data Protector Software can enable the drive encryption and provide basic key management capabilities. Additional ISV supporting hardware encryption information is available on the HP StorageWorks Enterprise Backup Solution website at www.hp.com/go/ebs. The encryption on LTO-4 media occurs with or without compression, and without speed or capacity penalties. You can read LTO-2 and LTO-3 tapes, and write LTO-3 tapes, but hardware encryption is not supported in these formats.

LTO-4 uses the Advanced Encryption Standard (AES) with the longest and most secure keys -- 256 bits. AES-256 is implemented within Galois Counter Mode (GCM). This is a method of increasing AES security by efficiently adding Message Authentication Codes to ensure the integrity of the backup data stored on tape. The HP LTO-4 Ultrium Tape Drives are designed to be compliant with the emerging standard for tape drive security (IEEE 1619.1).

Product Highlights

Encryption

The HP Secure Advantage portfolio is expanding to include a new offering intended for data protection in small to medium businesses. The HP StorageWorks 1/8 G2 & MSL LTO-4 Encryption Kit provides a library-enabled encryption solution that greatly enhances data privacy, confidentiality, and integrity of your critical business data while supporting compliance requirements. While there are a wide range of encryption solutions available, the HP StorageWorks 1/8 G2 & MSL LTO-4 Encryption Kit is intended to be an easy and affordable library-enabled solution for small businesses.

Protect the confidentiality and integrity of your data:

The encryption kit includes two USB key server tokens, product documentation, and firmware support. One encryption kit is needed per library or autoloader and it must be physically accessible so that the USB token can be inserted into the automation device. One of the two tokens will plug into the USB port in the autoloader or library and will generate and maintain encryption keys for the LTO-4 drives/libraries. The USB key server token uses a hardware random number generator, a cryptographic module running on FIPS 140-2 Level 3 validated hardware, password authentication, and digital envelopes for strong encryption keys and security operations. The second USB token is intended to provide a backup to the first. The keys are transferred securely token-to-token for backup or export, with no exposure to insecure PCs, servers, or networks. The encryption kit provides a self-contained solution for MSL libraries with no additional software, PCs, or servers required or involved.

Protect IT resources and meet compliance requirements:

With the HP StorageWorks 1/8 G2 & MSL LTO-4 Encryption Kit, users can enable or disable encryption, configure the USB key server tokens, restore encrypted data, as well as a variety of other tasks. In addition, the LTO-4 tape drives use the Advanced Encryption Standard (AES) with the longest and most secure keys -- 256 bits. AES-256 encryption is implemented using the Galois Counter Mode (GCM). This method adds Message Authentication Codes to ensure the integrity as well as privacy of the backup data stored on tape. The HP LTO-4 Ultrium Tape Drives are designed to be compliant with the emerging standard for tape media security (IEEE 1619.1).

Serviceability

Modular in design, the MSL8096 Tape Library has easily replaceable components minimizing the Mean-Time-to-Repair on the unit. Replaceable components include the tape drive, the magazines, the power supply and the controller board. HP StorageWorks Library and Tape Tools (L&TT) provides easy access to the MSL8096 error log, generates support tickets, and enables firmware downloads. L&TT can be downloaded for free at: <http://www.hp.com/support/tapetools>.

LTO Ultrium Technology

HP StorageWorks LTO (Linear Tape Open) Ultrium Tape Drives use best of breed technology. By taking the best features from other tape technologies and combining them into a single new technology, Ultrium tape drives are in a league of their own. Inclusion of innovative features such as Adaptive Tape Speed (ATS) ensure that Ultrium drives can meet the performance and reliability demands of a library environment. LTO technology is an open industry standard format; thus data written on HP StorageWorks Ultrium Tape Drives can be interchanged directly with Ultrium Tape Drives from other vendors.

Product Highlights

Data Rate Matching

Data Rate Matching combines sophisticated buffer management with HP's exclusive variable Adaptive Tape Speed technology, to allow the tape drive to match its transfer rate to the host speed dynamically and continuously across the wide range of transfer rates. This feature ensures that the tape drive continues to stream data regardless of the environment, and brings two big advantages:

- It optimizes backup performance and maximizes overall efficiency allowing the drive to respond immediately to any speed changes from the host
- It minimizes rewinding and repositioning of the tape, significantly reducing physical wear and increasing reliability
- It minimizes the power requirements for the drive by reducing the number of repositions needed

LTO Ultrium Tape Drive	ATS data transfer rate range (native)
HP LTO-4 Ultrium 1840	40 to 120 MB/s
HP LTO-4 Ultrium 1760	27 to 80 MB/s
HP LTO-3 Ultrium 960	27 to 80 MB/s

HP Ultrium WORM

Critical to the success of data retention policies in highly regulated environments is the ability to store and manage data in an unalterable state. Following stringent guidelines set forth by regulatory agencies such as the SEC and HIPPA, IT organizations must now integrate new solutions and policies that can verify the integrity of stored data for periods that can extend well beyond seven years.

The LTO-4 Ultrium and LTO-3 Ultrium tape drives features the ability to archive and store data in a non-rewriteable format that meets the most stringent regulatory guidelines. Using a combination of integrated fail-safe features in the drive firmware, cartridge memory, and tape formatting, the tape drives can archive large amounts of data for periods of up to 30 years in a secure, untampered state. Since all LTO-4 Ultrium and LTO-3 Ultrium tape drives include support for both rewritable and WORM media, IT organizations can now easily integrate a secure, long-term archiving solution into their current data protection strategy. As compared to other technologies that feature support for WORM storage, the tape drives offer the advantages of:

- A single drive to support all backup and archiving needs
- Two distinctive tape cartridges to easily distinguish and manage both rewriteable and WORM data cartridges
- A specially designed WORM data cartridge with multiple integrated fail-safe features to prevent accidental or intentional overwriting of data
- High-capacity, low-cost HP WORM media that can store up to 1.6 TB (2:1 compression) of data on a single data cartridge
- Support from many backup and archiving software vendors, providing the most comprehensive and mainstream support in the industry
- The LTO open standard that offers greater choice and compatibility across all third- and fourth-generation Ultrium products

NOTE: While all HP LTO-4 Ultrium and LTO-3 Ultrium tape drives support LTO Ultrium WORM media, some third- and fourth-generation LTO Ultrium tape drives from other manufacturers may not include read and write support for LTO Ultrium WORM media. For non-HP third- and fourth-generation LTO Ultrium tape drives, please check the manufacturers' specifications to ensure this support is provided if you are using your WORM media. If WORM support is not provided, the drive will eject the WORM tape cartridge immediately upon insertion into to the tape drive.

Product Highlights

HP Data Protector Software

HP Data Protector Software automates high performance backup and recovery, from disk or tape, over unlimited distances, to enable 24x7 business continuity and improve IT resource utilization. Data Protector Software responds to the pressure for lower IT costs and greater operational efficiency by offering acquisition and deployment costs which are 30 - 70 % less than competition. The license model is very simple and easy to understand, helping to reduce complexity. Extensive scalability and features for continuous backup and recovery operations enable growth with a single product. A superb solution, no other software can integrate better with the HP market-leading line of StorageWorks disk and tape family of products, as well as with other heterogeneous storage infrastructures. As an integral component of the fast-growing HP StorageWorks software portfolio, which includes storage resource management, archiving, replication, and device management software, Data Protector Software also fully integrates with the HP OpenView management solutions, allowing managing data protection as an essential element of an overall IT service. This solution offers the unique advantage of being able to source hardware, software, and award winning service offerings from a single, trusted source.

Data Protector Software simplifies the use of complex backup and recovery procedures with the fastest installation, automated routine tasks, and easy-to-use features. The centralized multi-site management easily allows implementing multi-site changes, adapting in real time to changing business requirements. Appropriate for medium and large companies in any industry, Data Protector Software is the ideal solution to reduce IT costs and complexity while remaining reliable and scalable to grow from single server environments to the largest distributed enterprise infrastructures.

If you are using HP Data Protector Software with your MSL8096 tape library, a FREE 61-250 slot License-to-Use entitlement certificate is included in the box.

For further information, please visit our web page at: <http://www.hp.com/go/dataprotector>

HP StorageWorks Library and Tape Tools

The MSL8096 Tape Library is supported on HP's industry-leading diagnostic tool - HP StorageWorks Library and Tape Tools (L&TT). L&TT is a single, convenient program that is easy to install and simple to operate. L&TT's intuitive user interface eliminates the need for training and deploys in less than five minutes. This robust diagnostic tool is designed for both the experienced professional and the untrained administrator. It ensures product integrity through self-diagnostics and fast resolution to device concerns. Additional information on L&TT plus download information can be found at: <http://www.hp.com/support/tapetools>.

HP Storage Media

HP recommends that you use HP-branded cartridges in the MSL8096 Tape Library to assure the highest level of protection for your valuable data. The test program for HP media is the most thorough and comprehensive in the industry.

All HP cartridges must satisfy an exhaustive battery of additional tests that relate directly to real life situations, where real data and real businesses are at stake. The benefit of the HP brand specification for media is consistent quality. Through the testing of thousands of HP drives and HP cartridges, the ideal formulation for backup performance is defined and then continuously monitored. This hugely resource-intensive process is unique to HP and affords deep insight into the HP+HP backup solution for a wide range of environments and duty cycles. Your best choice for ease of support and maximum dependability is to use HP-branded Ultrium cartridges at all times.

HP strongly encourages the use of bar code labels on tapes to track media and ensure optimum library performance and usability. Correctly labeling your media will allow the library to quickly determine media and drive compatibility.

Product Highlights

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Customization must comply with all relevant product specifications and factory supported configurations. Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, and HP 9000 servers as well as MSA, VA7xxx, EVA, and XP disk arrays, rackable tape libraries and configurable network switches.

Type of service support varies by platform and product family. For more information on Factory Express services for your specific server model or storage device please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

Compatibility

HP's extensive compatibility testing program assures that your HP StorageWorks MSL8096 Tape Library works with leading servers, operating systems, and backup applications - and not just those sold by HP. The MSL8096 works seamlessly in many environments, making them especially suitable if you have a mixed system environment. For the latest list of servers, workstations, operating systems, and backup software that support the MSL8096, check the HP StorageWorks Enterprise Backup Solution compatibility matrix at: <http://www.hp.com/go/ebs>.

Server Compatibility The MSL8096 is supported on a wide range of HP systems. For details of which MSL8096 works with which systems, including third-party systems, reference the EBS compatibility matrix at: <http://www.hp.com/go/ebs> for the latest hardware compatibility information.

OS Support Reference the EBS compatibility matrix for the most up-to-date OS compatibility information at: <http://www.hp.com/go/ebs>.

Software Support Reference the EBS compatibility matrix for the most up-to-date software compatibility information at: <http://www.hp.com/go/ebs>.

Service and Support, HP Care Pack and Warranty Information

Warranty

The warranty for this product consists of 1-year onsite, next business day.

NOTE: The HP MSL8096 Tape Library warranty includes support for Customer Self Repair (CSR). The tape library cartridges, terminators, external cables, drives, magazines, controller board and power supplies are mandatory customer self repair parts. This means both the removal and replacement of the above parts are designed for easy replacement; the on-site warranty does not extend to these parts. However, customers may request HP Services to replace these replaceable units (RUs) for an additional charge. Also, customers who purchase an HP Support Agreement have the option to perform CSR or receive onsite support.

Please refer to HP's Limited Warranty Statement for further details:

<http://h18006.www1.hp.com/products/storageworks/warranty.html>

Warranty Upgrade Options

- Response - Upgrade on-site response from next business day to same day 4-hours
- Coverage - Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours
- Duration - Select duration of coverage for a minimum period of 1 year or multiple years

Customer Self Repair

HP products are designed with many Customer Self Repair (CSR) parts to minimize repair time and allow for greater flexibility in performing defective parts replacement. If during the diagnosis period, HP identifies that the repair can be accomplished by the use of a CSR part, HP will ship that part directly to you for replacement. There are two categories of CSR parts:

- Parts for which customer self repair is mandatory. If you request HP to replace these parts, you will be charged for the travel and labor costs of this service.
- Parts for which customer self repair is optional. These parts are also designed for customer self repair. If, however, you require that HP replace them for your product.

HP Care Pack Information HP Care Pack is defined as an upgrade to the product warranty attribute, available for a specific duration and hours of coverage.

- HP Care Pack is not available for less than the products warranty duration.
- HP Care Pack is available for sale anytime during the warranty period for most products, but the commencement date will be the same as the warranty start date (delivery date to end user customer). Proof of purchase may be required.
- HP Care Pack services are prepaid.

For additional HP Care Pack (hardware & software) information, as well as orderable part numbers, please refer to the URL <http://www.hp.com/hps/carepack/>.

Hardware Product Services

- Installation services
- On-site Maintenance (includes warranty support)
- Response time upgrades during the warranty period
- Post-warranty coverage
- RAID setup and performance consulting via statement of work

For additional hardware installation and maintenance information, please refer to the URL listed below:

<http://www.hp.com/hps/hardware/>

Service and Support, HP Care Pack and Warranty Information

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit <http://www.hp.com/support>

Support Services

HP Services provides up to a three-year, limited warranty, fully supported by a worldwide network of resellers and service providers and 9x5 hardware technical phone support during the warranty period. In addition, available service offerings include a full range of optional packaged hardware and software services:

- Installation and start up
- Extended coverage hours and enhanced response times
- System management and performance services
- Availability and recovery services

Components

The following brick level options/components do not have individual HP Care Pack Services. These items will be included in product HP Care Pack Services into which they are installed.

Disk Drives	Tape Drives	CD/DVD ROM	SCSI Hubs in SBBs	Adapters
Bus Converters	Backplane RAID Controllers	Power Supplies	Cabling	Fans

Configuration Information

NOTE: The HP StorageWorks MSL8096 Tape Library comes standard with two drives, and a 96-slot library which is shipped rack-ready; a racking kit is included in the box. Each library includes a US power cord (C13, 10A) and PDU power cord (C13/C14, 10A). For additional or specific regional power cord requirements, a separate power cord must be ordered.

Step 1 – Base Configuration

Select one:

Model Name	Model Description	Part Number
HP StorageWorks	HP MSL8096 2 LTO-4 Ultrium 1840 FC Tape Library	AJ040A
MSL8096 Tape Library	HP MSL8096 2 LTO-4 Ultrium 1840 SCSI Tape Library	AJ039A
	HP MSL8096 4 LTO-4 Ultrium 1840 FC Tape Library	AN974A
	HP MSL8096 2 LTO-4 Ultrium 1760 SAS Tape Library	AK382A
	HP MSL8096 2 LTO-3 Ultrium 960 FC Tape Library	AH218A
	HP MSL8096 4 LTO-3 Ultrium 960 FC Tape Library	AN973A
	HP MSL8096 2 LTO-3 Ultrium 960 SCSI Tape Library	AH219A

Kit Contents (for each library):

- **SCSI Models:**
 - One 1.83M US Power Cord, C13, 10A
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One 6 ft VHDCI to HDTS68 SCSI cable per SCSI tape drive
 - One HDTS68 SCSI terminator per SCSI tape drive
 - One RJ-45 Ethernet cable
 - Rack mount hardware
 - HP Data Protector Software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately
 - Documentation kit including User & Service Guide (CD) and Getting Started Poster
- **SAS Model:**
 - One 1.83M US Power Cord, C13, 10A
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack mount hardware
 - HP Data Protector Software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately
 - Documentation kit including User & Service Guide (CD) and Getting Started Poster
- **Fibre Channel Models:**
 - One 1.83M US Power Cord, C13, 10A
 - One 2.5M PDU Power Cord, C13/C14, 10A
 - One RJ-45 Ethernet cable
 - Rack mount hardware
 - HP Data Protector Software 61-250 slot License-to-Use entitlement certificate. Warranty for 61-250 slot LTU will need to be purchased separately
 - Documentation kit including User & Service Guide (CD) and Getting Started Poster

Configuration Information

Step 2 – Additional Options

Select each option as required with quantities specified:

Power Cord	Description	Quantity	Part Number
	Power Cord, US, C13, 10A, 1.83m NOTE: This cord ships standard with each MSL8096 Tape Library; can be used to connect the rack-mounted device to PDUs with NEMA 5-15R receptacles.	1 each	AF556A
	PDU Power Cord, C13/C14, 10A, 2.5m NOTE: This cord ships standard with each MSL8096 Tape Library; can be used to connect the rack-mounted device to PDUs with IEC-320 receptacles.	1 each	142257-002
	Power Cord, Euro, C13, 10A, 1.83m	1 each	AF568A
	Power Cord, UK, C13, 10A, 1.83m	1 each	AF570A
	Power Cord, Danish, C13, 10A, 1.83m	1 each	AF566A
	Power Cord, Swiss, C13, 10A, 1.83m	1 each	AF565A
	Power Cord, Italian, C13, 10A, 1.83m	1 each	AF571A
	Power Cord, South Africa, C13, 10A, 2.5m	1 each	AF567A
	Power Cord, Taiwan, C13, 12A, 1.83m	1 each	AF561A
	Power Cord, China, C13, 10A, 1.83m	1 each	AF557A
	Power Cord, Japan, C13, 12A, 2.0m	1 each	AF572A
	Power Cord, Australia, C13, 10A, 2.5m	1 each	AF569A
	Power Cord, Argentina, C13, 10A, 2.5m	1 each	AF558A
	Power Cord, Brazil, C13, 10A, 1.83m	1 each	AF559A
	Power Cord, Korea, C13, 10A, 1.83m	1 each	AF560A
	Power Cord, Israel, C13, 10A, 1.83m	1 each	AF564A

NOTE: One power cord is required; please select the correct power cord for your geographical location.

WARNING: This product can ONLY be used with an HP approved power cord for your specific geographic region. Use of a non-HP approved power cord may result in: 1) not meeting individual country specific safety requirements; 2) insufficient conductor amperage that could result in overheating with potential personal injury and/or property damage; and 3) an unapproved power cord could fracture resulting in the internal contacts being exposed, which potentially could subject the user to a shock hazard. HP disclaims all liability in the event a non-HP approved power cord is used.

Related Options

Factory Racking	<p>Factory integrate the MSL8096 Tape Library with other HP products such as HP ProLiant Servers.</p> <p>NOTE: #0D1 will appear after the MSL8096 Tape Library part number on the sales order if HP factory integration is indicated.</p>	#0D1
Tape Drives	<p>HP MSL2024/4048/8096 LTO-4 Ultrium 1840 4Gb FC Drive Upgrade Kit NOTE: For use with the MSL8096 LTO-4 Ultrium 1840 FC Drive Library; maximum of four LTO-4 Ultrium 1840 FC drives per MSL8096 Tape Library. Drive kit includes a tape drive and documentation.</p> <p>HP MSL2024/4048/8096 LTO-4 Ultrium 1840 SCSI Drive Upgrade Kit NOTE: For use with the MSL8096 LTO-4 Ultrium 1840 SCSI Drive Library; maximum of four LTO-4 Ultrium 1840 SCSI drives per MSL8096 Tape Library. Drive kit includes a tape drive, SCSI cable, SCSI terminator, and documentation.</p> <p>HP MSL2024/4048/8096 LTO-4 Ultrium 1760 SAS Drive Upgrade Kit NOTE: For use with the MSL8096 LTO-4 Ultrium 1760 SAS Drive Library; maximum of four LTO-4 Ultrium 1760 SAS drives per MSL8096 Tape Library. Drive kit includes a tape drive and documentation.</p> <p>HP MSL 2024/4048/8096 LTO-3 Ultrium 960 FC 4Gb Drive Upgrade Kit NOTE: For use with the MSL8096 LTO-3 Ultrium 960 FC Drive Library; maximum of four LTO-3 Ultrium 960 FC drives per MSL8096 Tape Library. Drive kit includes a tape drive and documentation.</p> <p>HP MSL 2024/4048/8096 LTO-3 Ultrium 960 SCSI Drive Upgrade Kit NOTE: For use with the MSL8096 LTO-3 Ultrium 960 SCSI Drive Library; maximum of four LTO-3 Ultrium 960 SCSI drives per MSL8096 Tape Library. Drive kit includes a tape drive, SCSI cable, SCSI terminator, and documentation.</p> <p>HP MSL 2024/4048/8096 LTO-3 Ultrium 920 SAS Drive Upgrade Kit NOTE: For use with the MSL8096 LTO-3 Ultrium 920 SAS Drive Library; maximum of four LTO-3 Ultrium 920 SAS drives per MSL8096 Tape Library. Drive kit includes a tape drive and documentation.</p>	<p>AJ042A</p> <p>AJ041A</p> <p>AK383A</p> <p>AG328B</p> <p>AG327A</p> <p>AH562A</p>
Magazine Kits	<p>HP MSL4048/8096 Ultrium Left Magazine Kit NOTE: For use in the MSL8096 Tape Library in either the upper or lower left position. When used in the lower left position, user-enabled mail slots can be configured at either 0 or 3 slots.</p> <p>HP MSL2024/4048/8096 Ultrium Right Magazine Kit NOTE: For use only on the right side of the MSL8096 Tape Library; additional 12-slot magazine for either the right upper or lower position.</p>	<p>AG330A</p> <p>AG120A</p>
Redundant Power Supply Upgrade Kit	<p>HP MSL4048/8096 Redundant Power Supply Upgrade Kit NOTE: For use in the MSL8096 Tape Library to add a second customer-installable power supply into the unit. Includes a US power cord (C13, 10A); all other regions must order an appropriate power cord.</p>	AH220A

Related Options

Encryption	<p>HP 1/8 G2 & MSL Tape Library LTO-4 Encryption Kit AM495A</p> <p>NOTE: For use with new or installed LTO-4 Ultrium 1/8 G2 Tape Autoloaders and MSL2024/4048/8096 Tape Libraries. The encryption token will generate and retain encryption keys for HP LTO-4 Ultrium tape drives in the autoloader or library.</p>
Host Bus Adapters	<p>HP SC44Ge Host Bus Adapter 416096-B21</p> <p>NOTE: Serial-attached SCSI (SAS) HBA that enables HP StorageWorks MSL Tape Libraries to connect with HP ProLiant servers.</p> <p>HP U320e SCSI Host Bus Adapter AH627A</p> <p>NOTE: Dual channel PCI-Express (PCI-e) SCSI Ultra320 HBA that enables HP StorageWorks MSL Tape Libraries to connect with HP ProLiant servers.</p> <p>Reference the EBS compatibility matrix for the most up-to-date HBA compatibility information at: http://www.hp.com/go/ebs</p>
Cable Kits	<p>6 ft VHDCI/HDTS68 SCSI Cable Kit 341176-B21</p> <p>12 ft VHDCI/HDTS68 SCSI Cable Kit 341177-B21</p> <p>2m External Infiniband (SFF8470) to 4 Mini SAS (SFF8088) 1x SAS Cable Kit AH587A</p> <p>NOTE: One cable is required for every four drives.</p> <p>2m External mini-SAS to 4x1 mini-SAS Cable Kit AN975A</p> <p>NOTE: One cable is required for every four drives</p> <p>4m External mini-SAS to 4x1 mini-SAS Cable Kit AN976A</p> <p>NOTE: One cable is required for every four drives</p> <p>2m SW LC/SC FC Cable Kit 221691-B21</p> <p>5m SW LC/SC FC Cable Kit 221691-B22</p> <p>15m SW LC/SC FC Cable Kit 221691-B23</p> <p>2m SW LC/LC FC Cable Kit 221692-B21</p> <p>5m SW LC/LC FC Cable Kit 221692-B22</p> <p>15m SW LC/LC FC Cable Kit 221692-B23</p>
PCI Expansion Blade	<p>HP PCI Expansion Blade 448018-B21</p> <p>NOTE: Ships with one pre-installed PCI-X connect board. Also includes one PCIe connect board which requires installation.</p> <p>HP BladeSystem c-Class customers who have a c3000 or c7000 blade enclosure but don't have fibre infrastructure have the option to connect an MSL SAS Tape Library to the enclosure utilizing a PCI Expansion Blade. Configuration requires an HP SC44Ge HBA (416096-B21) installed inside the PCI Expansion Blade which resides next to the partner server blade (backup server) in the blade enclosure. Please visit the "SAS HBAs" section of the Enterprise Backup Solution (EBS) compatibility matrix at: www.hp.com/go/ebs for further compatibility details. Please visit: www.hp.com/go/blades for further details about the HP PCI Expansion Blade.</p> <p style="text-align: right;">341177-B21</p>

Related Options

Rack Cabinets	10622 (22U) Universal Rack Cabinet - Shock Pallet	AF022A
	10636 (36U) Universal Rack Cabinet - Shock Pallet	AF012A
	10636 (36U) Universal Rack Cabinet with extension - Shock Pallet	AF014A
	10642 (42U) Universal Rack Cabinet - Shock Pallet	AF002A
	10642 (42U) Universal Rack Cabinet with extension - Shock Pallet	AF004A

NOTE: The MSL8096 Tape Library is certified to ship in HP 10000 series racks which include a shock pallet. It is mandatory to use a shock pallet in order to ship racks with equipment installed.

5642 (42U) Rack Cabinet	358254-B21
-------------------------	------------

NOTE: this rack ships unassembled and boxed on a standard size pallet. It is an industry standard 19" wide rack with side panels and rear doors; it does not ship with the front door or casters.

NOTE: for additional HP ProLiant rack information, visit:

<http://h18004.www1.hp.com/products/servers/proliantstorage/racks/index.html>

Media	HP LTO4 Ultrium 1.6TB RW Data Cartridge (1 pack)	C7974A
	HP LTO4 Ultrium 1.6TB WORM Data Cartridge (1 pack)	C7974W
	HP Ultrium 800GB RW Data Cartridge (1 pack)	C7973A
	HP Ultrium 800GB WORM Data Cartridge (1 pack)	C7973W
	HP Ultrium 400GB data cartridge (1 pack)	C7972A
	HP Ultrium Universal Cleaning Cartridge (1 pack)	C7978A
	HP LTO4 Ultrium RW Bar Code Labels (100 pack)	Q2009A
	HP LTO4 Ultrium WORM Bar Code Labels (100 pack)	Q2010A
	HP Ultrium 3 RW Bar Code Labels (100 pack)	Q2007A
	HP Ultrium 3 WORM Bar Code Labels (100 pack)	Q2008A
	HP Ultrium 2 Bar Code Labels (100 pack)	Q2002A

Non-Custom Labeled Data Cartridges

NOTE: Non-Custom labels will come pre-labeled with a pre-determined number sequence.

HP LTO4 Ultrium 1.6TB RW Non-Custom Labeled Data Cartridge (20 pack)	C7974AN
HP Ultrium 800GB RW Non-Custom Labeled Data Cartridge (20 pack)	C7973AN
HP Ultrium 400GB Non-Custom Labeled Data Cartridge (20 pack)	C7972AN
HP Ultrium 200GB Non-Custom Labeled Data Cartridge (20 pack)	C7971AN

Custom Labeled Data Cartridges

NOTE: Custom labeled products allow customers to customize a specific sequence printed on each label.

HP LTO4 Ultrium 1.6TB RW Custom Labeled Data Cartridge (20 pack)	C7974AL
HP LTO4 Ultrium 1.6TB WORM Custom Labeled Data Cartridge (20 pack)	C7974WL
HP Ultrium 800GB RW Custom Labeled Data Cartridge (20 pack)	C7973AL
HP Ultrium 800GB WORM Custom Labeled Data Cartridge (20 pack)	C7973WL
HP Ultrium 400GB Custom Labeled Data Cartridge (20 pack)	C7972AL
HP Ultrium 200GB Custom Labeled Data Cartridge (20 pack)	C7971AL

Related Options

Storage Media Kits

NOTE: Kit includes 20 data cartridges, one cleaning cartridge, 20 colored labels, a protective carrying case that can be used to securely store or transport data cartridges, one copy of "The Essentials of Successful Tape Backup," and one copy of HP StorageWorks Data Protector Express Evaluation Software (60 day free trial).

HP Ultrium 800GB Storage Media Kit	C8017A
HP Ultrium 400GB Storage Media Kit	C8014A
HP Ultrium 200GB Storage Media Kit	C8013A

HP Care Pack Options

Same Day Response

Warranty upgrade to 1-year, 13x5, 4 hour response/onsite, electronic	UF835E
Warranty upgrade to 1-year, 24x7, 4 hour response/onsite, electronic	UF836E
Warranty upgrade to 1-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	UF837E
Warranty upgrade to 3-year, 13x5, 4 hour response/onsite, electronic	UF839E
Warranty upgrade to 3-year, 24x7, 4 hour response/onsite, electronic	UF840E
Warranty upgrade to 3-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	UF841E
Warranty upgrade to 4-year, 13x5, 4 hour response/onsite, electronic	UF842E
Warranty upgrade to 4-year, 24x7, 4 hour response/onsite, electronic	UF843E
Warranty upgrade to 5-year, 13x5, 4 hour response/onsite, electronic	UF844E
Warranty upgrade to 5-year, 24x7, 4 hour response/onsite, electronic	UF845E

Next Business Day Response

Warranty upgrade to 3-year next business day/onsite, electronic	UF838E
---	--------

Hardware Services

Installation services, electronic	U4824E
SAN installation & startup service, electronic	UA872E

NOTE: In order to maximize ROI and product uptime, and minimize the cost of ownership, Hewlett-Packard recommends the 3-year, 24 x 7 service options. These offerings will ensure that any product issue can be tackled when they occur (most back up issues will occur outside standard business hours) and that the service coverage regarding period, covers the minimum expected life of the host system.

QuickSpecs

HP StorageWorks MSL8096 Tape Library

Technical Specifications

		MSL8096 LTO-4 Ultrium 1840	MSL8096 LTO-4 Ultrium 1760	MSL8096 LTO-3 Ultrium 960
Drive Technology		LTO-4 Ultrium 1840	LTO-4 Ultrium 1760	LTO-3 Ultrium 960
Number of Drives		2 to 4	2 to 4	2 to 4
Number of Slots		96	96	96
Drive Interface		4Gb Native Fibre Channel Ultra320 LVD SCSI	3Gb/sec SAS	4Gb Native Fibre Channel Ultra320 LVD SCSI
Capacity	Native	76.8 TB	76.8 TB	38.4 TB
	Compressed (2:1)	153.6 TB	153.6 TB	76.8 TB
Maximum Transfer Rate	Native	864 GB/hr (two drives) 1.7 TB/hr (four drives)	576 GB/hr (two drives) 1.1 TB/hr (four drives)	576 GB/hr (two drives) 1.1 TB/hr (four drives)
	Compressed (2:1)	1.7 TB/hr (two drives) 3.4 TB/hr (four drives)	1.1 TB/hr (two drives) 2.3 TB/hr (four drives)	1.1 TB/hr (two drives) 2.3 TB/hr (four drives)
Dimensions		Out-of-Box (HxWxD)	13.9 X 18.9 X 31.7 in (35.2 x 48 x 80.6 cm)	
		Shipping (HxWxD)	26 X 25.8 X 40.1 in (68.5 x 65.5 x 102.5 cm)	
Weight		Out-of-Box	102.7 lbs (46.6 kg)	
		Shipping	164 lbs (74.4 kg)	
Reliability		MSBF (mean swaps between failures)	2 Million robot load/unload cycles	
		MTBF (mean time between failures)	100,000 hours (based on 1M MSBF)	
Average Cartridge Swap Time		50 seconds (drive to slot, slot to drive)		
Initialization Time		80 to 120 seconds		
Inventory Time		4:30 minutes (using bar code labeled cartridges)		
Connectors		Mini-SAS (located on back of MSL8096 SAS model only) 68-pin HDTS (located on back of MSL8096 SCSI models only) LC Optical Fibre (located on back of MSL8096 FC models only) (1) RJ-45 (located on back of MSL8096) (1) USB Port (diagnostic only; located on the back of the MSL8096)		
LED Indicators (on front panel)		Ready LED (Green): shows ready status information Clean LED (Amber): shows fault status information Attention LED (Amber): shows fault status information Error LED (Amber): shows fault status information		
Management Interface		10/100 Mbytes/second, auto-configuring interface. RJ-45 connection. Https configurable.		
Power		312 Watts (max)		
Input Requirements		100 to 240 VAC, 50 to 60 Hz, 2.5 Amperes		
Relative Humidity (non-condensing)		Operating	20% to 80%	
		Shipping	20% to 90%	

QuickSpecs

Technical Specifications

Temperature Range (wet bulb)	Operating	50° to 95° F (10° to 35° C)
	Shipping	-22° to 140° F (-30° to 60° C)
	NOTE: Library operating temperature limits are based on the industry standard tape limit.	
Altitude	Operating	10,000 ft (3048 m)
	Shipping	35,000 ft (10,675 m)

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For tape drives and media, 1 GB = 1 billion bytes. Actual formatted capacity is less.