


Overview

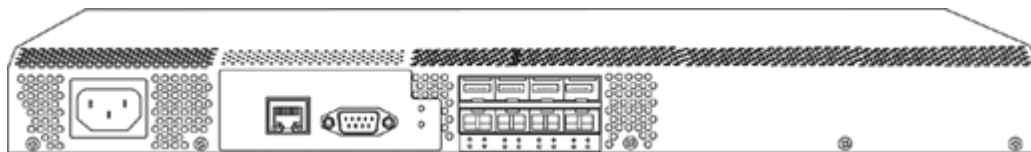

Introduction

The highly available HP StorageWorks SAN Switch 2/8V and 2/8V Power Pack offer 2 Gb connectivity for an entry-level storage area network (SAN), and the ability to grow to a core-to-edge infrastructure. The simplicity and ease-of-use advantages of the SAN Switch 2/8V and 2/8V Power Pack can help increase administrator productivity and lower the cost of management. This can be especially beneficial for organizations with limited IT expertise.

The Switch delivers eight high performance Auto Sensing 1 and 2 Gb Fibre Channel ports. In addition, the SAN Switch 2/8V and 2/8V Power Pack are fully non-blocking and provide 16 Gb switching (2 Gb full duplex) capacity for un-congested sustained, 2 Gb full duplex throughput. The SAN Switch 2/8V scales to a maximum fabric configuration of two switches and can be upgraded to full SAN configurations by purchasing a full fabric upgrade license. Small-form-factor-pluggable optical transceivers (SFPs) must be ordered separately.

The Power Pack provides the SAN administrator with the necessary tools to monitor the health and performance of the network, while also ensuring the highest levels of security, scalability and manageability. Available pre-configured on the switch or as an upgrade, Power Pack also provides the foundation for integration into HP OpenView Storage Area Manager (SAM), enabling infrastructure management through a single-pane-of-glass. The Power Pack tools can be ordered separately, as well.

Key Features and Benefits

- **Reduced Total Cost of Ownership for SAN Infrastructure**
 - Enables storage consolidation, simplified management of data center SAN environment
- **Interoperability with the more than 1 MILLION port HP SAN Switch installed base**
- **Highest integration with HP Open View Storage Area Manager via:**
 - SAN Switch API
 - SAN Switch element managers
 - HP StorageWorks Fabric Manager
- **Broadest range of compatibility with SAN products**
 - Multi-vendor server and storage environment
 - Widest range of HP SAN solutions
 - Backward compatible with previously installed 1Gb SAN Switches
 - Support for multi-protocol gateways
- **HP Power Pack (Optional) - highest supported modular functionality**
 - Trunking - highest throughput between switches (8Gb/sec)
 - HW enforced WWN Zoning (Advanced Zoning)
 - Proactive threshold monitor (Fabric Watch)
 - Advanced Performance Monitor
 - Per Switch element manager (WebTools)
 - Support for extended distance (Extended Fabrics)
- **Broadest Range of HP Packaged SAN Services**
 - Mission critical SAN Services SAN-ES
 - Assessment and installation services for security
- **Flexible storage connectivity**
 - The only SAN solutions providing the complete HP SAN Switch functionality from Embedded to Enterprise. The HP SAN Switch value line products allows the capability to apply the complete SAN Switch functionality to an affordable entry level SAN deployment and then to grow that deployment to the largest SAN fabric solutions supported by HP.

QuickSpecs

HP StorageWorks SAN Switch 2/8V and 2/8V Power Pack B-Series Family

Overview

HP StorageWorks SAN Switch 2/8V SAN Switch 2/8V Power Pack Models	HP StorageWorks SAN Switch 2/8V	AA979A
	HP StorageWorks SAN Switch 2/8V 2-Switch to Full Fabric Upgrade License	T4261A
	HP StorageWorks SAN Switch 2/8V Power Pack	AA980A
	SAN Switch Power Pack Software Bundle (optional)	T3573A

Models

8 non-blocking ports	Eight auto-sensing 1 and 2 Gb universal, self-configuring ports (F, FL, E). Can be programmed to fixed 1 Gb or 2 Gb speed. Full 16 Gb switching capacity for un-congested fully sustained, 2 Gb full duplex throughput.
Configuration support	SAN Switch 2/8V Power Pack will interoperate with 1Gb and 2Gb B-Series SAN Switches running the firmware version defined in the SAN Design Guide http://h18000.www1.hp.com/products/storageworks/san/documentation.html
High-availability features	<ul style="list-style-type: none">• Hot Code Load Activation
Advanced Fabric Services	<ul style="list-style-type: none">• ISL Trunking (optional)• Hardware Enforced Zoning• WebTools• Fabric Watch (optional)• End-to-End Performance Analysis (optional)
Manageability	<ul style="list-style-type: none">• WebTools• OpenView• API• IP• SNMP
Scalability	<ul style="list-style-type: none">• SAN Switch 2/8V has a two switch SAN scaling limit (standard)• Optional full SAN scaling license
Cabinet Support	<ul style="list-style-type: none">• 22U, 36U, and 42U; 5000, 9,000 and 10,000 series StorageWorks Cabinets are supported• 25U, 33U, and 41U HP system/e cabs

Software Components, Standard

Frame Filtering	An ASIC based capability in the 2Gb family of switches that enables new applications and features. The switch now has the ability to "view" the first 64 bytes of the Fibre Channel frame. At this time, Frame Filtering enables advanced capabilities such as Advanced Zoning and Advanced Performance Monitoring.
Advanced Zoning	In the 2 Gb generation of switches, WWN Zoning and Access Control are enforced by hardware that provides the same simple administration previously enforced only with software. Administrators can organize a physical fabric into logical groups and prevent unauthorized access by devices outside the Zone.
WebTools	Enables organizations to monitor and manage single Fibre Channel switches and small SAN fabrics. Tasks can be performed through a Java-capable Web browser from a standard laptop, desktop PC or workstation from any location within the enterprise.

Product Highlights

Software Components, Optional

SAN Switch 2/8V Power Pack Software Bundle Includes bundled license for:

- ISL Trunking
- Advanced Performance Monitoring
- Fabric Watch

NOTE: The Extended Fabric license is no longer part of the Power Pack bundle for the 8-port and 16-port switch models.

ISL Trunking

For high performance enhanced Trunking, this optional license logically groups up to four E-ports to provide a high bandwidth trunk between two switches. Each 2 Gb switch needs its own license. The switch operating system views the trunk as a single, high bandwidth resource (up to 8 Gb) when routing connections between switches. Connections are load-balanced across the individual links, which comprise the logical trunk group. Each 8-port switch can have a total of two separate 4-port Trunk groups.

Advanced Performance Monitor

This enabling technology helps administrators monitor and watch specific fabric metrics from a SID (Source ID) to a DID (Destination ID), so they can fine-tune and scale the fabric more efficiently. Plus, Advanced Performance Monitoring includes the ability for early warning detection of hot spots within the fabric, a powerful tool for maintaining overall balanced performance.

Fabric Watch

Fabric Watch enables each switch to monitor the SAN for potential faults-and automatically alert network managers to problems before they become failures. Fabric Watch tracks a variety of SAN fabric elements, events, and counters. Monitoring fabric-wide events, ports, SFPs, and environmental parameters permits early fault detection and isolation as well as performance measurement. Each switch in the SAN needs its own Fabric Watch license.

Extended Fabric

Extends all of the scalability, reliability, and performance benefits of Fibre Channel Storage Area Networks (SANs) beyond the native 10 km distance specified by the Fibre Channel standard. Required with future use of Very Long Distance SFPs and/or wavelength division multiplexing (WDM or DWDM). **NOTE:** The Extended fabric option is no longer supported in the new 4 Gb/s 8-port and 16-port switch models. It is supported only in the 2 Gb/s legacy models.

Fabric Manager

Fabric Manager is a highly scalable, Java-based application that manages multiple switches and multiple fabrics (up to eight) in real time, helping SAN administrators with SAN configuration, monitoring, dynamic provisioning, and daily management. SAN administrators gain rapid access to critical SAN information across multiple personality fabrics.

Secure Fabric OS

Secure Fabric OS™ is a comprehensive security solution for SAN fabrics, providing policy-based security protection for more predictable change management, assured configuration integrity and reduced risk of downtime. Secure Fabric OS protects the network by using the strongest, enterprise-class security methods available, including digital certificates and digital signatures, multiple levels of password protection, strong password encryption and Public Key Infrastructure (PKI)-based authentication, and 128-bit encryption of the switch's private key used for digital signatures. With its flexible design, Secure Fabric OS enables organizations to customize SAN security to meet specific policy requirements. In addition, Secure Fabric OS works in conjunction with Advanced Zoning to further secure access to the SAN, simplify storage management, and reduce provisioning time.

QuickSpecs

HP StorageWorks SAN Switch 2/8V and 2/8V Power Pack B-Series Family

Product Highlights

Full Fabric License for 2/8V

Expands connectivity from 2 switch scaling to full fabric scaling. Please see the following web site for further information:

<http://h18006.www1.hp.com/products/storageworks/san/documentation.html>

Service and Support, HP Care Pack, and Warranty Information

Warranty

(1-1-1) Hardware Warranty - One-year on-site warranty, 8x5, next business day response, installation not included.

NOTE: The hardware warranty covers firmware and embedded non-saleable software. Saleable software carries its own warranty, see below.

Software Warranty - HP warrants only that the software media will be free of physical defects for a period of ninety (90) days from delivery. EXCLUSIVE REMEDY. The entire liability of HP and its suppliers and your exclusive remedy for software that does not conform to this Limited Warranty shall be the repair or replacement of the defective media. This warranty and remedy are subject to your returning the defective media during the warranty period to HP in the country in which you obtained the software.

HP Service & Warranty Support

HP Service & Warranty Support Additional Warranty protection and/or HP Installation packages can be purchased.

NOTE: Certain restrictions and exclusions apply. Consult the Customer Support Center for details. HP provides a one-year, hardware limited warranty, fully supported by a worldwide network of resellers and service providers.

In addition, available service offerings include a full range of HP Care Pack packaged hardware and software services:

- Installation
- Extended coverage hours and enhanced response times
- System management and performance services

For more information on warranty and support options, please visit our Web site at:

<http://www.hp.com/hps/tech/storage/supp/>.

Software Product Services

- Stand-alone telephone support
- Rights to new license version
- Media and documentation updates

Hardware Product Services

- Installation services
- On-site maintenance (includes warranty support)
- Response time upgrades during the warranty period
- Post-warranty coverage

HP Care Pack Services Warranty Upgrade Options

Service offerings include a full range of Customer HP Care Pack services for both hardware and software services:

- Response - Upgrade on-site response from next business day to same day 4-hours
- Coverage - Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours
- Duration - Select duration of coverage for a period of 1, 3, or 5 years

Additional Warranty protection and/or HP Installation packages can be purchased.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

Service and Support, HP Care Pack, and Warranty Information

HP Care Pack Information HP Care Pack is defined as an upgrade to the product warranty attribute, available for a specific duration and hours of coverage.

- HP Care Pack is not available for less than the product's warranty duration.
- HP Care Pack is available for sale anytime during the warranty period for most products, but the commencement date will be the same as the Warranty Start Date (delivery date to end user customer). Proof of purchase may be required.
- HP Care Pack services are prepaid.

For additional HP Care Pack (hardware & software) information, as well as orderable part numbers, please refer to the URL listed below:

<http://h18005.www1.hp.com/services/carepaq/index.html>

Additional Services

Implementation service, SAN Architecture service. For more information on service options, please visit our Web site at: <http://www.hp.com/go/san>.

QuickSpecs

HP StorageWorks SAN Switch 2/8V and 2/8V Power Pack B-Series Family

Family Information

Features	MSA SAN Switch 2/8 (embedded switch)	SAN Switch 2/8V and SAN Switch 2/8V Power Pack	SAN Switch 2/16V	SAN Switch 2/16N FF and SAN Switch 2/16N Power Pack	SAN Switch 2/32 and SAN Switch 2/32 Power Pack	Core 2/64 and Core 2/64 Power Pack	SAN Director 2/128 and Director 2/128 Power Pack
Targeted Environment	Workgroups, Departments	Workgroups, Departments	Workgroups, Departments	Departments, Data Centers	Departments, Data Centers	Data Centers	Data Centers
Port Bandwidth	2 Gbit/sec	2 Gbit/sec	2 Gbit/sec	2 Gbit/sec	2 Gbit/sec	2 Gbit/sec	2 Gbit/sec
Aggregate device bandwidth	32 Gbit/sec end-to-end	32 Gbit/sec end-to-end	64 Gbit/sec end-to-end	64 Gbit/sec end-to-end	128 Gbit/sec end-to-end	256 Gbit/sec end-to-end	512 Gbit/sec end-to-end
OS Support	Refer to SAN Design Guide pointer http://www.compaq.com/products/StorageWorks/san/documentation.html						
Storage system support	MSA, MA8000 EMA12000/ EMA16000 EVA, XP, VA	MA8000 EMA12000/ EMA16000 EVA, XP, VA,MSA	MA8000 EMA12000/ EMA16000 EVA, XP, VA,MSA	MA8000 EMA12000/ EMA16000 EVA, XP, VA,MSA	MA8000 EMA12000/ EMA16000 EVA, XP, VA,MSA	MA8000 EMA12000/ EMA16000 EVA, XP, VA,MSA	MA8000 EMA12000/ EMA16000 EVA, XP, VA,MSA
Ports	7 external/1 internal	8 SFP	16 SFP	16 SFP	32 SFP	32 SFP Base 64 Total	32 SFP Base 128 Total
Cascading support	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Advanced Trunking	Optional Upgrade	Included with Power Pack or Optional Upgrade	Optional Upgrade	Included with Power Pack or Optional Upgrade	Included with Power Pack or Optional Upgrade	Included with Power Pack or Optional Upgrade	Included with Power Pack or Optional Upgrade
Form factor	Embedded	1U	1U	1U	1.5U	14U	14U
Zoning Software	Yes (Included)	Yes (Included)	Yes (Included)	Yes (Included)	Yes (Included)	Yes (Included)	Yes (Included)
Hot plug, redundant power supplies	No	No	No	No	Yes	Yes	Yes
Hot plug fans	No	No	No	No	Yes	Yes	Yes
Enterprise Backup Solution (EBS) support**	Yes	Yes	Yes	Yes	Yes	Yes	Yes

**NOTE: Requires correct Host Bus Adapter. Not all Operating Systems Supported.

Configuration Information

Step 1 – Base Configuration

Select one:

Model Name	Model Description	Part Number
StorageWorks SAN Switch 2/8V	8-port Fibre Channel Fabric Switch, licenses, docs, and rack rails. NOTE: Requires optical transceivers listed below.	AA979A
StorageWorks SAN Switch 2/8 Power Pack	8-port Fibre Channel Fabric Switch with bundled software and rack rails. NOTE: Requires optical transceivers listed below.	AA980A

Add Software

Power Pack Software Bundle for SAN Switch 2/8V	Fabric Watch, ISL Trunking, Extended Fabric, Advanced Performance Monitoring	T3573A
---	--	--------

Optional Software:	Fabric Watch	324504-B21
	ISL Trunking	324506-B21
	Advanced Performance Monitor	324507-B21
	Extended Fabric	324505-B21
	Secure Fabric OS for 8 & 16 port switches (v3.x firmware or higher)	332924-B21
	Fabric Manager , v5.x Base Edition (10 domains)	T4270A
	Fabric Manager, v5.x Enterprise Edition	T4269A
	Fabric Manager, v4 to v5 Enterprise License Upgrade	T4272A
	Fabric Manager, v4 to v5 Base License Upgrade	T4271A
Fabric Manager, v5 base to v5 enterprise upgrade license	T4273A	

Step 2 – Additional Options

Optical Transceivers	2Gb/s Short Wave	A6515A
		300834-B21
	2Gb/s Long Wave (10 km)	A6516A
		300835-B21
	2Gb/s Long Wave (35 km)	300836-B21

2 Gb optical cables	LC-LC for between two 2 Gb devices	
	2 m LC-LC Multi-Mode Fibre Channel Cable	221692-B21
	5 m LC-LC Multi-Mode Fibre Channel Cable	221692-B22
	15 m LC-LC Multi-Mode Fibre Channel Cable	221692-B23
	30 m LC-LC Multi-Mode Fibre Channel Cable	221692-B26
	50 m LC-LC Multi-Mode Fibre Channel Cable	221692-B27
	LC-SC for between a 1 Gb and a 2 Gb device	
	2 m LC-SC Multi-Mode Fibre Channel Cable	221691-B21
	5 m LC-SC Multi-Mode Fibre Channel Cable	221691-B22
	15 m LC-SC Multi-Mode Fibre Channel Cable	221691-B23
	30 m LC-SC Multi-Mode Fibre Channel Cable	221691-B26
	50 m LC-SC Multi-Mode Fibre Channel Cable	221691-B27

QuickSpecs

HP StorageWorks SAN Switch 2/8V and 2/8V Power Pack B-Series Family

Configuration Information

Fibre Channel Standards	FC-AL Rev. 4.5	FC-GS-2 Rev 5.3	FC-PH Rev 4.3	FC-PLDA Rev 2.1	FC-VI Rev 1.5
And Revisions	FC-AL-2 Rev 7.0	FC-FG Rev 3.5	FC-PH-2 Rev 7.4	FC-SW Rev 3.3	IPFC RFC 2625
	FC-FLA Rev 2.7	FC-FH Rev 1.7	FC-PH-3 Rev 9.4		

QuickSpecs

HP StorageWorks SAN Switch 2/8V and 2/8V Power Pack B-Series Family

Technical Specifications

Fibre Channel ports	8 universal ports		
Scalability	Full fabric architecture: http://h18006.www1.hp.com/products/storageworks/san/documentation.html		
Certified maximum	Refer to SAN Design Guide: http://h18006.www1.hp.com/products/storageworks/san/documentation.html		
Interoperability	<ul style="list-style-type: none"> SAN Switch 8, SAN Switch 16, SAN Switch 8-EL, SAN Switch 16-EL, Integrated /32, Integrated /64, SAN Switch2/16, SAN Switch 2/16-EL, SAN Switch 2/16N, SAN Switch 2/16V, SAN Switch 2/32, Core Switch 2/64, SAN Director 2/128; 4/256 SAN Director; SAN Switch 4/32; 4/8 SAN Switch; 4/16 SAN Switch; Brocade 4Gb SAN Switch for HP p-Class BladeSystem; MSA SAN Switch 2/8 		
Performance	2.125 Gbit/sec line speed, full duplex		
Switch core	Non-blocking		
Fabric latency	<2 μ sec. with no contention, cut-through routing		
Maximum frame size	2112-byte payload		
Classes of service	Class 2, Class 3, Class F (inter-switch frames)		
Port types	FL_Port, F_Port, and E_Port; self-discovery based on switch type (U_Port)		
Data traffic types	Fabric switches support unicast, multicast (256 groups), and broadcast		
Media types	Small Form-Factor Pluggable (SFP)		
Laser	Short-wave up to 1,640 ft (300 m); long-wave up to 6.2 mi (10 km) when available		
Fabric services	Simple Name Server, Registered State Change Notification (RSN), Alias Server (multicast); and Zoning, WebTools. Optional Fabric Watch, and Extended Fabrics		
Options	SFP media		
Supported software	Telnet, SNMP, WebTools, Advanced Zoning, Fabric Watch, Extended Fabrics		
Management access	10/100 Ethernet (RJ-45), serial port		
Diagnostics	POST and embedded online/offline diagnostics		
Back-to-front airflow, power from rear	1 u, 19-in.-EIA compliant		
Dimensions	Width	16.87.in (42.86 cm)	
	Height	1.71 in (4.2 cm)	
	Depth	12.1in (30.73 cm)	
	Weight	8.5 lb (3.9 kg)	
Environment	Temperature	Operating	50° to 104° F (10° to 40° C)
		Non-operating	-13° to 158° F (-25° to 70° C)
	Humidity	Operating	5% to 85% at 104° F (40° C)
		Non-operating	104° F (40° C)
	Altitude	Up to 9,800 ft (3,000 m)	
	Shock	80 G, 2.5 ms, half sine	
	Vibration	Operating	.5 G, 5-500-5 Hz
		Non-operating	2 G, 5-5 kHz
Power	Supported power range	Nominal	100 to 240 VAC contiguous, 0.5 A for each power supply
		Operational	90 to 264 VAC
	Frequency	47 to 63 Hz	

Technical Specifications

© Copyright 2005 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.