


### Overview

#### HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter

The HP FlexFabric 10Gb 2-port 534FLR-SFP+ adapter features the next generation of 10Gb Ethernet offering in a single chip solution on a FlexibleLOM form factor, further reducing power requirements for 2 ports of 10Gb Ethernet. It is designed for use with HP ProLiant Gen8 and Gen9 servers.

For more effective utilization of the 10GbE bandwidth, the HP 534FLR-SFP+ CNA offers Switch Independent Network Partitioning (NPAR) which enables segmentation of each 10GbE port into four virtual ports, with flexible allocation of bandwidth to each port. Allowing IT organizations to improve resource utilization while lowering infrastructure and operational costs.

The HP 534FLR-SFP+ supports enterprise class features such as VLAN tagging, adaptive interrupt coalescing, MSI-X, NIC teaming (bonding), Tunnel offloads (NVGRE, VxLAN), Receive Side Scaling (RSS), jumbo frames and PXE boot. It also supports virtualization features such as SR-IOV VMware NetQueue and Microsoft VMQ.que no

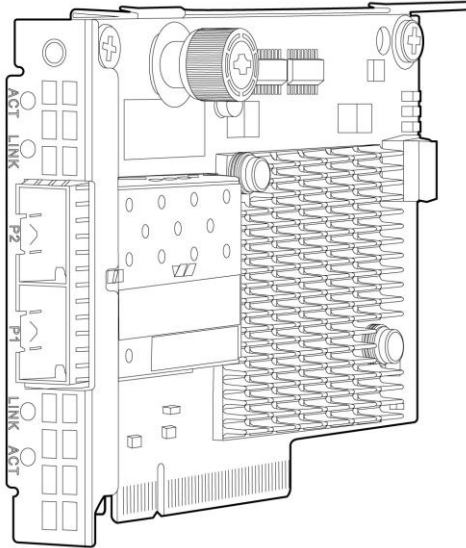

### Models

HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HP FlexFabric 10Gb 2-port 534FLR-SFP+ FIO Adapter	700752-B21

### Kit Contents

- HP Ethernet 10Gb 2-port 534FLR-SFP+ Adapter
- Quick install card
- Product warranty statement

### Compatibility

#### Servers

##### **ProLiant DL (rack-optimized):**

- HP ProLiant DL60 Gen9
- HP ProLiant DL80 Gen9
- HP ProLiant DL160 Gen9
- HP ProLiant DL180 Gen9
- HP ProLiant DL360 Gen9
- HP ProLiant DL380 Gen9
- HP ProLiant DL160 Gen8
- HP ProLiant DL360p Gen8
- HP ProLiant DL380p Gen8
- HP ProLiant DL385p Gen8
- HP ProLiant DL560 Gen8
- HP ProLiant DL580 Gen8
- HP ProLiant DL560 Gen9
- HP ProLiant DL580 Gen9

##### **ProLiant SL (scalable line):**

- HP SL2500 Scalable Systems
- HP ProLiant SL210t Gen8
- HP ProLiant SL230s Gen8
- HP ProLiant SL250s Gen8
- HP ProLiant SL270s Gen8

##### **HP Apollo Server:**

- HP ProLiant XL220a Gen8 v2
- HP ProLiant XL230a Gen9
- HP ProLiant XL250a Gen9

**NOTE:** This is a list of supported servers. Some may be discontinued.

---

### Standard Features

#### Product Features

- Industry-leading throughput and latency performance
- Up to 40Gb/s bi-directional near line rate throughput
- Hardware acceleration TCP/IP/UDP stateless offloads, as well as for TCP Offload Engine (TOE)
- Improved small packet performance
- Tunnel offload support (NVGRE, VxLAN)
- Low profile design shipping with standard height and low-profile brackets
- Optimized for virtual server environments with support for Network Partitioning (NPAR) and Single-Root I/O Virtualization (SR-IOV)Active Health Systems support via FW (OCBB), I2C capable
- PXE, Jumbo Frames, Checksum & Segmentation Offload, IPv6 and RSS
- On chip temperature monitor (OCSD)
- Standard server operating system support
- Standard NC series option kit warranty, support, services
- Field replaceable and upgradeable
- Support for Preboot eXecution Environment (PXE)
- Integrated PHY and MAC
- IEEE 1588 (Time Synchronization)

---

**Dual-port 10 Gigabit Ethernet Throughput** The HP 534FLR-SFP+ adapter delivers 20 Gbps full duplex Ethernet transfer rate per port (40 Gbps per adapter), providing the network performance needed to improve response times and alleviate bottlenecks that impact performance of next generation data centers. 10Gb Ethernet bandwidth is ideal for high performance computing, database clusters, and more.

---

**Jumbo Frames** The HP 534FLR-SFP+ adapter supports jumbo frames (also known as extended frames), permitting up to a 9K byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over 5X the size of a standard 1500-byte Ethernet frame. With jumbo frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

---

**TCP/IP Stateless Offloading** TCP, IP, UDP checksum offload, Large Send Offload (LSO), TCP, Segmentation Offload (TSO). These features optimize host efficiency, leaving the CPU available for other duties.

The HP 534FLR-SFP+ Adapter by QLogic offers TCP/IP stateless offloading capability.

---

**MSI and MSI-X** Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores. The HP 534SFP+ Adapter by QLogic supports MSI and MSI-X.

---

**802.1Q VLANs** IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of the HP 534FLR-SFP+ adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance. The HP 534FLR-SFP+ Adapter by QLogic provides support for 802.1Q (VLAN).

---

**Tunnel Offload** Minimize the impact of overlay networking on host performance with tunnel offload support for VXLAN and NVGRE. By offloading packet processing to adapters, customers can use overlay networking to increase VM migration flexibility and network scale with minimal impact to performance. HP Tunnel Offloading increases I/O throughput, reduces CPU utilization, and lowers power consumption. NVGRE tunnel offload supports Microsoft OS environments and VxLAN supports select VMware and Linux (RHEL and SUSE) environments.

---

**TOE** TCP/IP Offload Engine (TOE) shifts the processing of data in the TCP protocol stack from the server CPU to the adapter's processor, freeing server CPU cycles for other operations.

### Standard Features

---

**Single-Root I/O Virtualization**

Single-Root I/O Virtualization (SR-IOV) provides a mechanism to bypass the host system hypervisor in virtual environments providing near metal performance and server efficiency. SR-IOV provides mechanism to create multiple Virtual Functions (VFs) to share single PCIe resources. The device supports SR-IOV with appropriate server BIOS and OS support.

---

**Optimized for Virtualization**

I/O Virtualization support for VMware NetQueue and Microsoft VMQ help meet the performance demands of consolidated virtual workloads.

---

**Checksum & Segmentation Offload**

Normally the TCP Checksum is computed by the protocol stack. By selecting one of the "Checksum Offload" parameters, the checksum can be computed by the adapter.

Segmentation Offload is technique for increasing outbound throughput of high-bandwidth network connections by reducing CPU overhead. The technique is also called TCP segmentation offload (TSO) when applied to TCP, or generic segmentation offload (GSO).

The HP 534FLR-SFP+ Adapter by QLogic has Checksum and Segmentation Offload capabilities.

---

**IPv6**

IPv6 uses 128-bit addressing allowing for more devices and users on the internet. IPv4 supported 32-bit addressing.

The HP 534FLR-SFP+ Adapter by QLogic supports IPv6

---

**Receive Side Scaling (RSS)**

RSS resolves the single-processor bottleneck by allowing the receive side network load from a network adapter to be shared across multiple processors. RSS enables packet receive-processing to scale with the number of available processors.

The HP 534FLR-SFP+ Adapter by QLogic has RSS capabilities.

---

**Time synchronization implementations (PTP)**

Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.

The HP 534FLR-SFP+ Adapter by QLogic supports Precision Time Protocol-ready (PTP).

---

**iSCSI/FCoE**

The HP 534FLR-SFP+ Adapter supports accelerated iSCSI or iSCSI boot and FCoE.

---

**Network Adapter Teaming**

The HP 534FLR-SFP+ adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, The team of adapters can work together as a single virtual adapter. The HP 534FLR-SFP+ provides support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.

---

**Network Partitioning** The HP 534FLR-SFP+ supports Network Partitioning (NPAR) for ProLiant Gen8 and Gen9 rack servers. Allowing administrators to configure a 10Gb port as four separate partitions or physical functions. Each PCI function is associated with a different virtual NIC. To the OS and the network, each physical function appears as a separate NIC port.

---

### Network Management

### Standard Features

<b>Management Support</b>	The HP 534FLR-SFP+ adapter can be administered from HP Systems Insight Manager (SIM). The adapters can be managed individually or in teams, providing SNMP based statistics for reporting purposes. The HP 534SFP+ adapter can also be managed by other applications with SNMP support.
<b>Server Integration</b>	<p>The HP 534FLR-SFP+ adapter is a validated, tested, and qualified solution that is optimized for HP ProLiant servers. HP validates a wide variety of major operating systems drivers with the full suite of web-based enterprise management utilities including HP Intelligent Provisioning and HP Systems Insight Manager that simplify network management.</p> <p>This approach provides a more robust and reliable networking solution than offerings from other vendors and provides users with a single point of contact for both their servers and their network adapters.</p>
<b>Configuration Utilities</b>	Each HP 534FLR-SFP+ ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.
<b>LED Indicators</b>	The colored LEDs on each port of the HP 534FLR-SFP+ adapter indicate link status and link activity.
<b>Preboot eXecution Environment (PXE)</b>	PXE allows the server to boot over the network and download software residing in the network.
<b>HP Sea of Sensors 3D</b>	Support for HP's Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can kick on fans and make other adjustments to reduce energy usage. What makes it better is the upgrade from all six fans kicking on at one time to a new system where only one kicks on - the one in proximity of the area that started heating up - thus reducing the amount of energy used for cooling.
<b>VMware NetQueue and Microsoft Virtual Machine Queue (VMQ)</b>	<p>VMware NetQueue is technology that significantly improves performance of 10 Gigabit Ethernet network adapters in virtualized environments.</p> <p>Windows Hyper-V VMQ (VMQ) is a feature available on servers running Windows Server 2008 R2 with VMQ-enabled Ethernet adapters. VMQ uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets and copying them from the management operating system to the virtual machine.</p> <p>The HP Ethernet 10Gb 2-port 534FLR-SFP+ Adapter by QLogic support VMware NetQueue and Windows Hyper-V VMQ.</p>
<b>Warranty</b>	<p>Maximum: The remaining warranty of the HP product in which it is installed (to a maximum three-year, limited warranty).</p> <p>Minimum: One year limited warranty.</p> <p><a href="http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html">Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html</a></p>

### Service and Support

#### Service and Support **HP Technology Services**

HP Technology Services offers you technical consultants and support expertise to solve your most complex infrastructure problems. We help keep your business running, boost availability, and avoid downtime.

#### **Protect your business beyond warranty with HP Care Pack Services**

When you buy HP Options, it's also a good time to think about what level of service you may need. HP Care Pack services provide total care and support expertise with committed response choices designed to meet your IT and business need.

HP Foundation Care services deliver scalable support-packages for HP industry-standard servers and software. You can choose the type and level of service that is most suitable for your business needs. New to this portfolio is HP Collaborative Support. If you are running business critical environments, HP offers Proactive Care or Critical Advantage. These services help you deliver high levels of application availability through proactive service management and advanced technical response.

Here is the support service recommendation from the Foundation Care and Proactive Care portfolio. For customized support service solution, HP can work with you to tailor a service solution for your unique support requirements using broader services portfolio of Foundation Care and Proactive Care.

---

### Recommended HP Care Pack Services for optimal satisfaction with your HP product

#### Recommended Services

#### **3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service**

Provides you with rapid remote support and if required an HP authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf>

**OR**

#### **3-Year HP 24x7 4 hour Response, HP Collaborative Support**

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution, and basic software problem diagnosis, fault isolation, and resolution if available to HP. If the problem is with HP HW, the representative will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged. In case, the issue is with HP or supported third-party software product and cannot be resolved by applying known fixes, HP will contact the third-party vendor and create a problem incident on your behalf.

#### **HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

---

### Related HP Care Pack Services to enhance your HP product experience

#### Related Services

#### **3-Year HP 24x7 4 hour Response, Proactive Care or Critical Advantage**

Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your query or issue end to end until resolved, delivering a single point of contact for you

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA3-2140ENW.pdf>

**OR**

#### **3-Year HP 6-hour Onsite Call-to-Repair, HP Collaborative Support**

### Service and Support

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution to return the hardware in operating condition within 6 hours of the initial service request to the HP Global Solution Center, and basic software problem diagnosis, fault isolation, and resolution if available to HP. In case, the issue is with HP or supported third-party software product and cannot be resolved by applying known fixes, HP will contact the third-party vendor and create a problem incident on your behalf.

#### **HP Proactive Select Service**

Provides a flexible way to purchase HP best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months. <http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENN.pdf>

---

#### **Insight Remote Support**

Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more <http://www.hp.com/go/insightremotesupport>

---

#### **HP Support Center**

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more <http://www.hp.com/go/hpsc>

HP's Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

\*HP' Support Center Mobile App is subject to local availability

---

#### **Parts and materials**

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Supplies and consumable parts will not be provided as part of this service; standard warranty terms and conditions apply. Parts and components that have exceeded their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual or the technical product data sheet will not be provided, repaired or replaced as part of this service.

---

#### **Warranty / Service Coverage**

For ProLiant servers and storage systems, this service covers HP-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by HP as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.

---

#### **For more information**

To learn more on services for HP ESSN Options, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant> or [www.hp.com/services/bladesystem](http://www.hp.com/services/bladesystem)

### Related Options

<b>Fiber Optic Cables</b>	HP LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable	AJ833A
	HP LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable	AJ834A
	HP LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable	AJ836A
	HP LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable	AJ837A
	HP LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable	AJ838A
	HP LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable	AJ839A

**NOTE:** Fiber transceivers and cables must be purchased separately for fiber-optic environments.

**NOTE:** For additional information on 10Gb cable specifications go to: [http://www.hewlett-packard.com/rnd/pdfs/10gig\\_cabling\\_technical\\_brief.pdf](http://www.hewlett-packard.com/rnd/pdfs/10gig_cabling_technical_brief.pdf)

<b>Additional Supported Cables (Plug into HPN5900)</b>	HP X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C
	HP X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
	HP X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
	HP X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
	HP X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C
	HP X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
	HP X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
	HP X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A

<b>Additional Supported Cables (Plug into HPN6600)</b>	HP X242 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281B
	HP X242 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283B
	HP X242 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285B

<b>Fiber Optic Modules</b>	HP BladeSystem c-Class 10Gb SFP+ SR Transceiver	455883-B21
	HP BladeSystem c-Class 10Gb SFP+ LR Transceiver	455886-B21

<b>Gigabit Server Adapters</b>	HP NC112T PCI Express Gigabit Server Adapter	503746-B21
	HP NC365T 4-port Ethernet Server Adapter	593722-B21
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21

<b>10 Gigabit Server Adapters</b>	<b>NOTE:</b> A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.	
	HP NC523SFP 10Gb 2-port Server Adapter	593717-B21
	<b>NOTE:</b> NC524SFP is available only on DL370 G6, ML370 G6, DL580 G7, DL585 G7, and DL980 G7.	
	HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
	HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
	HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
	HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
	HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
HP Ethernet 10Gb 2-port 570SFP+ Adapter	718904-B21	

<b>FlexibleLOM Adapters</b>	<b>NOTE:</b> A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.	
-----------------------------	---	--



### Related Options

#### Ethernet Adapters

HP Ethernet 1Gb 4-port 331FLR Adapter	629135-B21
HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HP Ethernet 10Gb 2-port 530FLR-SFP+ Adapter	647581-B21
HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HP Ethernet 10Gb 2-port 561FLR-T Adapter	700699-B21

#### FlexFabric Adapters

HP FlexFabric 10Gb 2-port 526FLR-SFP+ Adapter	629138-B21
HP FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HP FlexFabric 10Gb 2-port 554FLR-SFP+ Adapter	629142-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information:  
[www.hp.com/go/ProLiantNICs](http://www.hp.com/go/ProLiantNICs)

### Technical Specifications

<b>General Specifications</b>	<b>Network Processor</b>	QLogic 57810S chipset		
	<b>Data Rate</b>	Two ports, each at 20 Gbps full duplex; 40 Gbps aggregate full duplex theoretical bandwidth.		
	<b>Onboard Memory</b>	256MB		
	<b>Bus Type</b>	PCI-e 2.0 x8		
	<b>Form Factor</b>	Standard and low profile adapter compliant with the PCIe standard		
	<b>IEEE Compliance</b>	802.3, 802.3ae, 802.3x, 802.2x, 802.3ad, 802.1Qaz, 802.1Qau, 802.1Qbb, 802.1Qbg, 802.1ax		
<b>Power and Environmental Specifications</b>	<b>Operating</b>	Temperature	32° to 131° F (0° to 55° C)	
		Humidity	5% to 95% non-condensing	
	<b>Power</b>	9W maximum		
	<b>Emissions classification</b>	Class A		
	<b>Agency approvals</b>	USA	FCC Part 15 Class A	
		Canada	ICES---3, Issue 4	
		Japan	VCCI V3 (2010.04) Class A	
		International	EN55022:2006 + A1:2007 Class A, EN55024:1998+A1:2011+A2; EN61000-3-2:2006, EN61000-3-3:2008	
		Taiwan	BSMI, CNS13438 (2006) Class A	
		Australia/New Zealand (AS/NZS):	EN55022:2006+A1 2007 class A	
<b>RoHS Compliance</b>	6 of 6			
<b>Safety</b>	UL Mark (USA and Canada)			
	CE Mark			
	EN 60590			
<b>Operating System Support</b>	<b>Microsoft:</b>	Microsoft Windows Server 2008 SP2 and R2 w/SP1 (x86 and x64) Microsoft Windows Server 2012, 2012 R2 Microsoft Windows Hyper-V 2008 R2 w/SP1, 2012, 2012 R2		
	<b>Linux:</b>	Red Hat Enterprise Linux (RHEL) 5, 6 and 7 SUSE Linux Enterprise Server 11 and 12		
	<b>Solaris:</b>	Solaris 10 and 11		
	<b>Hypervisors:</b>	VMware ESXi 5.x and 6.x VMware vSphere 5.5		
	<b>NOTE:</b>	1. For more operating system support & certification information, please visit: <a href="http://h10018.www1.hp.com/wwsolutions/index.html">http://h10018.www1.hp.com/wwsolutions/index.html</a>		
		2. Minimum Linux versions for FCoE support include RHEL 6.4 and SLES11SP3.		
		3. vSphere 5.5 is the minimum version of VMware for SRIOV support.		
		4. Boot from SAN via the iSCSI offload path is not supported for VMware.		
		5. Networking only support for Solaris and Citrix XenServer.		

### Technical Specifications

---

#### Environment-friendly Products and Approach

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

---

### Summary of Changes

Date	Version History	Action	Description of Change:
19-Jun-2015	From Version 4 to 5	Removed	Obsolete skus removed: <ul style="list-style-type: none"> <li>• 412648-B21</li> <li>• 435508-B21</li> <li>• 394793-B21</li> <li>• 394791-B21</li> <li>• 458492-B21</li> <li>• 581201-B21</li> </ul>
		Changed	Overview, Compatibility, Standard Features, Technical Specifications, Related Options sections were updated.
28-Nov-2014	From Version 3 to 4	Changed	Overview, Compatibility, Standard Features and Technical Specifications sections were updated.
		Added	Section Fiber Optic Modules added on Related Options, skus added on this section: <ul style="list-style-type: none"> <li>• 455883-B21</li> <li>• 455886-B21</li> </ul>
13-Aug-2014	From Version 2 to 3	Changed	Graphic was changed. Broadcom was replaced by QLogic. iSCSI/FCoE sub-section added in Standard Features.
09-May-2014	From Version 1 to 2	Changed	Product name was revised throughout.

© Copyright 2015 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Windows is a US registered trademark of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.